

CHN 60P

P156x156


High-Performance 60 Cell Poly Crystalline
156x156mm
Solar Photovoltaic Module

255W

275W

We focus on precise production and provide Customer with best cost-effective products to create Market Value for Customer

CHN 60P 255W/260W/265W/270W/275W

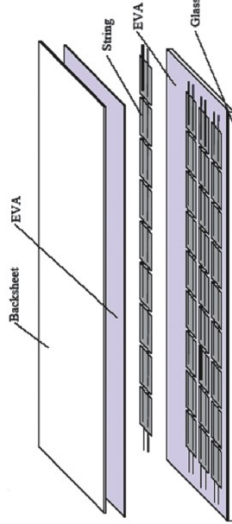

Power tolerance (0~+3%) to ensure the high reliability of power output

Modules certified by TÜV to with stand high level of wind loads (2400 Pa) and snow loads(5400 Pa)

Special PV Module Insurances by world leading insurance company guarantees the benefit of PV investors and PV module users

Junction box and bypass diodes guarantee the modules free of overheating and "hot spot effect"

Guaranteed Performance**

10 Years Manufacturing Warranty

12 Years Warranty
90% Power Output

25 Years Warranty
80% Power Output

Free module recycling through membership in the Green Cycle Association


choosing chinaland solar

- The most vertically integrated solar manufacturer in the industry with production of ingots, wafer, solar cells and modules using both mono crystalline and multi crystalline technology.
- Global distribution with local warehousing, delivery and after sales services.
- Modules certified by global testing facilities: IEC61215, IEC61730, CE, ROHS.
- Manufacturing with international quality standards and environment management system: ISO9001 and ISO14001.
- Most updated design with drainage holes in the frame ensures the modules to withstand various weather conditions.
- Minimal wiring effort required as the module has high reverse current resistance.

CHINALAND SOLAR ENERGY
www.chnland.com



MECHANICAL DRAWINGS

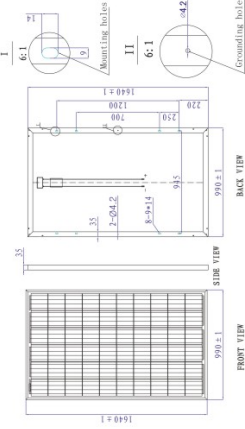

MECHANICAL SPECIFICATION

Cell Type	Poly Crystalline 156x156mm
Number of cells	60(6x10)
Dimensions(AxBxC)	1640x990x35mm
Weights	19kg
Front Glass	3.2mm tempered low iron glass
Frame	Anodized aluminum
Junction Box	IP67, with bypass diodes
Connector	MC4 compatible
Output Cables	TUV ,length 900mm; 4.0mm ²

ELECTRICAL CHARACTERISTICS

Maximum Power at STC(Pmax)	255W	260W	265W	270W	275W
Short Circuit Current(Isc)	8.80A	8.89A	8.94A	9.06A	9.20A
Open Circuit Voltage(Voc)	36.4V	36.7V	37.0V	37.2V	37.3V
Maximum Power Current(Imp)	8.30A	8.42A	8.54A	8.65A	8.78A
Maximum Power Voltage(Vmpp)	30.7V	30.9V	31.0V	31.2V	31.3V
Module Efficiency	15.71%	16.01%	16.32%	16.63%	16.94%
Power Tolerance	0~+3%	0~+3%	0~+3%	0~+3%	0~+3%

STC: irradiance 1000W/m²

Module temperature 25 C

AM=1.5


TEMPERATURE CHARACTERISTICS

Normal Operating Cell Temperature (NOCT)	45 C ±2 C
Temperature Coefficient of Pmax	-0.44% C
Temperature Coefficient of Voc	-0.34% C
Temperature Coefficient of Isc	0.06% C


PACKING CONFIGURATION

Container	20'GP	40'GP
Pieces per pallet	30	30
Pallets per container	14	28
Pieces per container	400	840

IV Curve of CHN60P at different temperatures




Power output curve at different temperatures



SYSTEM INTEGRATION PARAMETERS

Maximum system voltage	VDC 1000V
Maximum Series Fuse	15A
Increased snowload acc. to IEC 61215	5400Pa
Operating Temperature	-40to+85 C
Number of bypass diodes	3

INDUSTRY-LEADING WARRANTY BASED ON NOMINAL POWER



- Based on nominal power (pnom)
- 25-year transferrable power output warranty: 5 years/95%, 12 years/90%, 18 years/85%, 25 years/80%
- 10-year material and workmanship

QUALIFICATIONS AND CERTIFICATES

