

FRONIUS IG

/ The dependable PV inverter range.

/ Fronius
MIX™ technology/ HF transformer
switchover

/ WLAN interface

/ PC board
replacement process

/ With the Fronius IG product family, Fronius has launched a generation of inverters rated from 1.3 to 5 kW that is compatible with all solar modules. What makes the inverters so appealing is their intuitive operation and ease of use, together with their highly informative analyses of system values in every situation. In short: a PV inverter that any system operator would welcome.

TECHNICAL DATA: FRONIUS IG

INPUT DATA	IG 15	IG 20	IG 30	IG 40	IG 60 HV
DC maximum power at $\cos \varphi = 1$	1,610 W	2,150 W	2,850 W	4,410 W	5,380 W
Max. input current ($I_{dc \max}$)	10.8 A	14.3 A	19.0 A	29.4 A	35.8 A
Max. array short circuit current	16.2 A	21.5 A	28.5 A	44.1 A	53.7 A
Min. input voltage ($U_{dc \min}$)			150 V		
Feed-in start voltage ($U_{dc \text{ start}}$)			170 V		
Nominal input voltage ($U_{dc,r}$)			280 V		
Max. input voltage ($U_{dc \max}$)			500 V		530 V
MPP voltage range ($U_{mpp \min} - U_{mpp \max}$)			150 V – 400 V		
Number of DC inputs			5		


OUTPUT DATA	IG 15	IG 20	IG 30	IG 40	IG 60 HV
AC nominal output ($P_{ac,r}$)	1,300 W	1,800 W	2,500 W	3,500 W	4,600 W
Max. output power	1,500 W	2,000 W	2,650 W	4,100 W	5,000 W
Max. output current ($I_{ac \max}$)	6.5 A	8.7 A	11.5 A	17.8 A	21.7 A
Grid connection ($U_{ac,r}$)			1-NPE 230 V		
Min. output voltage ($U_{ac \min}$)			180 V		
Max. output voltage ($U_{ac \max}$)			270 V		
Frequency (f_r)			50 Hz / 60 Hz		
Frequency range ($f_{\min} - f_{\max}$)			47 Hz – 65 Hz		
Distortion factor			< 3 %		
Power factor ($\cos \varphi_{ac,r}$)			1		

GENERAL DATA	IG 15	IG 20	IG 30	IG 40	IG 60 HV
Dimensions (height x width x depth)	366 x 344 x 220 mm / 500 x 435 x 225 mm ¹⁾			610 x 344 x 220 mm / 733 x 435 x 225 mm ¹⁾	
Weight	9 kg / 12 kg ¹⁾			16 kg / 20 kg ¹⁾	
Degree of protection	IP 21 / IP 45 ¹⁾				
Protection class	1				
Overvoltage category (DC / AC)	2 / 3				
Night-time consumption	< 1 W				
Inverter concept	HF transformer				
Cooling	Regulated air cooling				
Installation	Indoor and outdoor installation ¹⁾				
Ambient temperature range	from -20°C to +50°C				
Permitted humidity	0 % to 95 %				
DC connection technology Fronius Indoor	Screw terminal connection 1.5 – 10 mm ²⁾ ; DC plug optional ²⁾				
DC connection technology Fronius Outdoor	DC plug ²⁾				
AC connection technology Fronius Indoor	Screw terminal connection 1.5 – 10 mm ²⁾ ; plug optional				
AC connection technology Fronius Outdoor	Screw terminal connection 1.5 – 10 mm ²⁾				
Certificates and compliance with standards	DIN V VDE V 0126-1-1, ÖVE/ÖNORM E 8001-4-712, UTE C15-712-1, EN 50438, G83, G59, C 10 / 11, CER 06-190, AS 4777-1, AS 4777-2, AS 4777-3				


¹⁾ This applies to Fronius IG Outdoor ²⁾ MC3, MC4 or Tyco

Further information regarding the availability of the inverters in your country can be found at www.fronius.com.

FRONIUS IG 60 HV EFFICIENCY CURVE

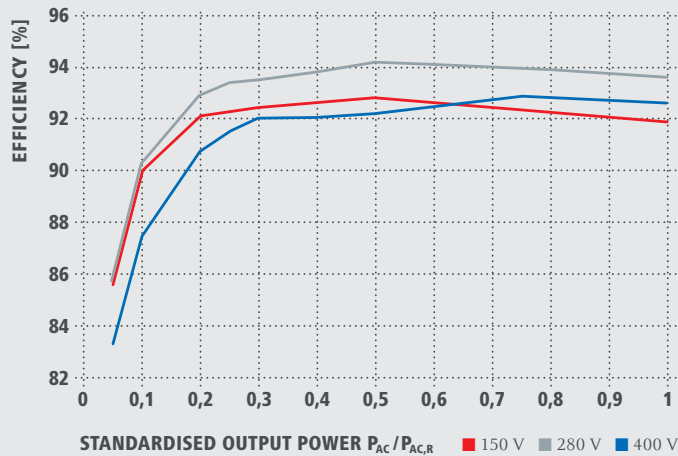

FRONIUS IG TEMPERATURE DERATING

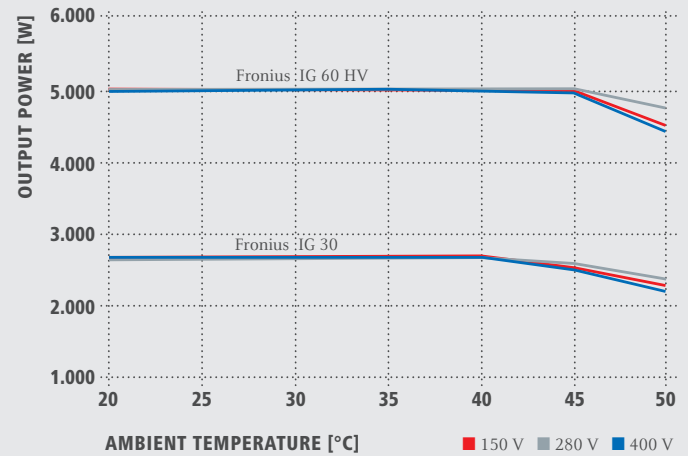

TECHNICAL DATA: FRONIUS IG

EFFICIENCY	IG 15	IG 20	IG 30	IG 40	IG 60 HV
Max. efficiency	94.2 %	94.3 %	94.3 %	94.3 %	94.3 %
European efficiency (η_{EU})	91.4 %	92.3 %	92.9 %	93.2 %	93.5 %
η at 5% $P_{AC,r}^{1)}$	75.0 / 76.9 / 71.1 %	77.4 / 80.6 / 71.1 %	81.6 / 83.1 / 81.4 %	82.7 / 83.3 / 80.2 %	85.6 / 85.8 / 83.3 %
η at 10% $P_{AC,r}^{1)}$	81.6 / 83.1 / 81.4 %	84.9 / 86.2 / 83.4 %	87.4 / 88.6 / 85.9 %	88.5 / 89.3 / 85.0 %	90.0 / 90.3 / 87.5 %
η at 20% $P_{AC,r}^{1)}$	87.8 / 89.2 / 85.9 %	89.7 / 90.5 / 87.3 %	91.2 / 91.8 / 89.1 %	91.5 / 92.3 / 89.6 %	92.2 / 93.0 / 90.8 %
η at 25% $P_{AC,r}^{1)}$	89.3 / 89.9 / 86.8 %	90.8 / 91.3 / 88.5 %	91.8 / 92.7 / 90.2 %	92.1 / 92.9 / 90.6 %	92.4 / 93.5 / 91.6 %
η at 30% $P_{AC,r}^{1)}$	90.1 / 90.7 / 87.9 %	91.5 / 92.3 / 89.8 %	92.3 / 93.2 / 90.9 %	92.4 / 93.3 / 91.1 %	92.5 / 93.6 / 92.1 %
η at 50% $P_{AC,r}^{1)}$	92.0 / 92.9 / 90.3 %	92.6 / 93.7 / 91.4 %	92.8 / 94.0 / 92.4 %	92.7 / 93.9 / 91.5 %	92.9 / 94.3 / 92.3 %
η at 75% $P_{AC,r}^{1)}$	92.7 / 93.8 / 91.7 %	92.8 / 94.3 / 92.6 %	92.4 / 94.3 / 92.8 %	92.9 / 94.1 / 92.6 %	92.5 / 94.1 / 92.9 %
η at 100% $P_{AC,r}^{1)}$	92.8 / 94.2 / 92.5 %	92.4 / 94.0 / 92.9 %	92.0 / 93.4 / 92.6 %	92.5 / 94.3 / 92.9 %	92.0 / 93.7 / 92.7 %
MPP adaptation efficiency	> 99.9 %				

PROTECTIVE EQUIPMENT	IG 15	IG 20	IG 30	IG 40	IG 60 HV
DC insulation measurement	Warning/shutdown (depending on country setup) at $R_{ISO} < 500 \text{ kOhm}$				
Overload behaviour	Operating point shift, power limitation				
Reverse polarity protection	Integrated				

INTERFACES	IG 15	IG 20	IG 30	IG 40	IG 60 HV
Optional with Fronius Datamanager	WLAN, Ethernet, Modbus TCP, 6 digital inputs, 4 digital inputs/outputs, Datalogger, Webserver				

¹⁾ and at $U_{mpp \min} / U_{dc,r} / U_{mpp \max}$.

Further information regarding the availability of the inverters in your country can be found at www.fronius.com.

/ Perfect Welding / Solar Energy / Perfect Charging

WE HAVE THREE DIVISIONS AND ONE PASSION: SHIFTING THE LIMITS OF POSSIBILITY.

/ Whether welding technology, photovoltaics or battery charging technology – our goal is clearly defined: to be the innovation leader. With around 3,000 employees worldwide, we shift the limits of what's possible - our record of over 1,000 granted patents is testimony to this. While others progress step by step, we innovate in leaps and bounds. Just as we've always done. The responsible use of our resources forms the basis of our corporate policy.

Further information about all Fronius products and our global sales partners and representatives can be found at www.fronius.com



v03 Jul 2014 EN

Fronius Australia Pty Ltd.
90-92 Lambeck Drive
Tullamarine VIC 3043
Australia
pv-sales-australia@fronius.com
www.fronius.com.au

Fronius UK Limited
Maidstone Road, Kingston
Milton Keynes, MK10 0BD
United Kingdom
pv-sales-uk@fronius.com
www.fronius.co.uk

Fronius International GmbH
Froniusplatz 1
4600 Wels
Austria
pv-sales@fronius.com
www.fronius.com