

# SG10KTL-M/SG12KTL-M

**SUNGROW**  
Clean power for all

SG10KTL-M/SG12KTL-M

Multi-MPPT String Inverter for 1000 Vdc System



## HIGH YIELD

- Industry leading efficiency of 98.6%
- Flexible PV string configurations with DC/AC ratio up to 1.3

## SMART MANAGEMENT

- Feature-rich online monitoring via App or Web
- Over-the-air firmware updates
- Gain energy flow transparency with Sungrow smart meter
- Accurate dynamic feed-in control


## SAFE AND DURABLE

- Built-in surge arresters and residual current protection
- High anti-corrosion rating at C5


## EASY AND USER FRIENDLY

- 20kg compact design
- Unique push-in connectors for time-saving installation
- Mounting plate with built-in level
- Fast and easy commissioning via App

## CIRCUIT DIAGRAM

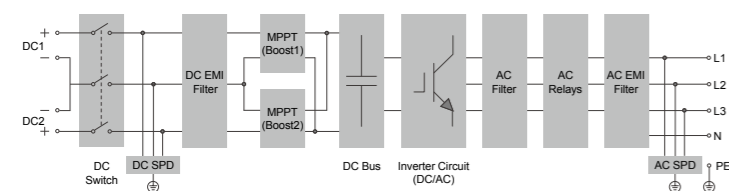

## EFFICIENCY CURVE

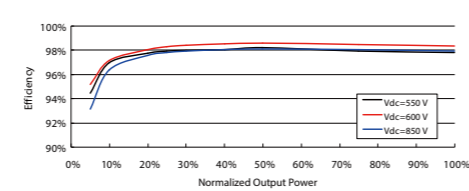

Type designation	SG10KTL-M	SG12KTL-M
<b>Input (DC)</b>		
Max. PV input voltage	1100 V	
Min. PV input voltage / Start-up input voltage	200 V / 250 V	
Nominal PV input voltage	600 V	
MPP voltage range	200 V – 1000 V	
MPP voltage range for nominal power	470 V – 850 V	550 V – 850 V
No. of independent MPP inputs	2	
Max. number of PV strings per MPPT	1	
Max. PV input current	22A (11 A / 11 A)	
Max. current for input connector	15 A	
Max. DC short-circuit current	30 A (15 A / 15 A)	
<b>Output (AC)</b>		
AC output power	11 kVA * @ 35 °C / 10 kVA @ 45 °C	13.2 kVA @ 35 °C / 12 kVA @ 45 °C
Max. AC output current	16.5 A	20 A
Nominal AC voltage	3 / N / PE, 230 / 400 V	
AC voltage range	270 V – 480 V	
Nominal grid frequency / Grid frequency range	50 Hz / 45 – 55 Hz, 60 Hz / 55 – 65 Hz	
THD	< 3 % (at nominal power)	
DC current injection	< 0.5 % In	
Power factor at nominal power	> 0.99	
Adjustable power factor	0.8 leading – 0.8 lagging	
Feed-in phases / connection phases	3 / 3	
<b>Efficiency</b>		
Max. efficiency / Euro. efficiency	98.6 % / 98.1 %	
<b>Protection</b>		
LVRT	Yes	
DC reverse connection protection	Yes	
AC short-circuit protection	Yes	
Leakage current protection	Yes	
Grid monitoring	Yes	
DC switch	Yes**	
AC switch	No	
PV string current monitoring	Yes	
PID recovery function	Optional	
Overvoltage protection	DC Type II / AC Type II	
<b>General Data</b>		
Dimensions (W*H*D)	370*485*160 mm	
Weight	20 kg	
Isolation method	Transformerless	
Degree of protection	IP65	
Night power consumption	< 1 W***	
Operating ambient temperature range	-25 to 60 °C (> 45 °C derating)	
Allowable relative humidity range	0 – 100 % (non-condensing)	
Cooling method	Natural cooling	
Max. operating altitude	4000 m (> 3000 m derating)	
Display / Communication	LED, Bluetooth + APP / RS485 (optional: WiFi, Ethernet)	
DC connection type	MC4 (Max. 6 mm <sup>2</sup> )	
AC connection type	Plug and play connector (Max. 6 mm <sup>2</sup> )***	
Compliance	IEC/EN 62109-1, IEC/EN 62109-2, IEC/EN 61000-3-11, IEC/EN 61000-3-12, UTE C15-712-1, IEC 61727, IEC 62116, VDE0126-1-1/4105, G59/3, CEI 0-21, UNE 206007-1, EN50438:2013	
Grid support	Active & reactive power control and power ramp rate control	
Type designation	SG10KTL-M	SG12KTL-M

\* :VDE4105 :10000VA

\*\* : Devices for Australia are not equipped with DC switches

\*\*\*:Deluxe Version: < 3W (DC & AC power supply); Max.10mm<sup>2</sup> (Unique push-in connector)

