



AC-290M/156-60S  
AC-295M/156-60S  
AC-300M/156-60S

[www.axitecsolar.com](http://www.axitecsolar.com)

**AXITEC**  
high quality german solar brand

## AXIworldpremium

60 cell monocrystalline  
High performance photovoltaic module


### The advantages:

- 12 Years** 12 years manufacturer's warranty
- P-Max** Highest performance due to specifically selected technologies and materials
- + Wp** Guaranteed positive power tolerance from 0-5 Wp by individual measurement
- 5.400 Pa** Maximum 5400 Pa snow load
- 100%** 100% electroluminescence inspection
- IP 67** High quality junction box and connector systems



### Exclusive linear AXITEC high performance guarantee!

- 15 years manufacturer's guarantee on 90% of the nominal performance
- 25 years manufacturer's guarantee on 85% of the nominal performance

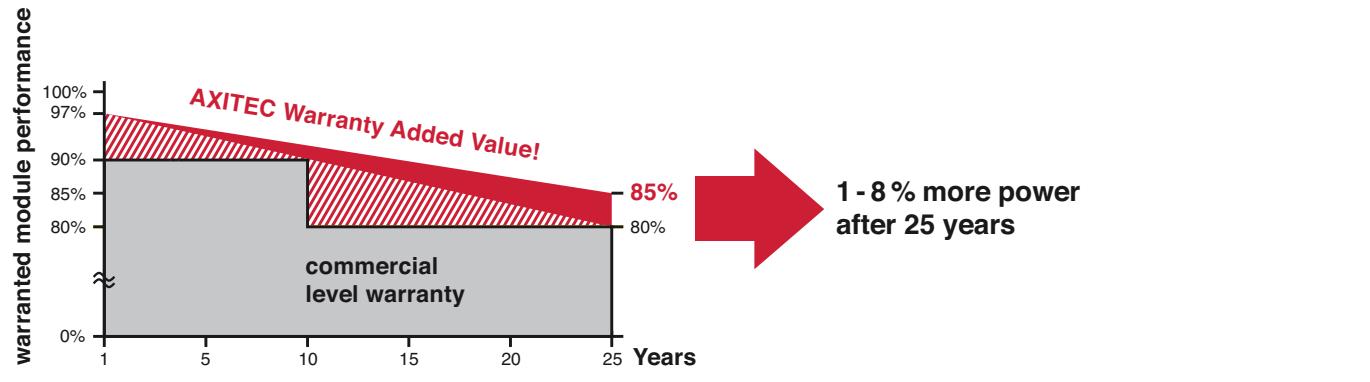

# AXIworld-premium

AC-290M/156-60S  
AC-295M/156-60S  
AC-300M/156-60S

[www.axitecsolar.com](http://www.axitecsolar.com)

**AXITEC**  
high quality german solar brand

Distributed by:



**Electrical data** (at standard conditions (STC) irradiance 1000 watt/m<sup>2</sup>, spectrum AM 1.5 at a cell temperature of 25°C)

Type	Nominal output Pmpp	Nominal voltage Umpp	Nominal current Impp	Short circuit current Isc	Open circuit voltage Uoc	Module conversion efficiency
AC-290M/156-60S	290 Wp	31,71 V	9,16 A	9,70 A	39,70 V	17,74 %
AC-295M/156-60S	295 Wp	31,80 V	9,29 A	9,75 A	39,95 V	18,04 %
AC-300M/156-60S	300 Wp	32,16 V	9,34 A	9,82 A	40,08 V	18,35 %

#### Design

Frontside	3,2 mm hardened, low-reflection white glass
Cells	60 monocrystalline high efficiency cells 156 mm x 156 mm (6")
Backside	Composite film
Frame	35 mm silver anodized aluminium frame

#### Mechanical data

L x W x H	1650 x 991 x 35 mm
Weight	18,0 kg with frame

#### Power connection



Socket	Protection Class IP67 (3 bypass diodes)
Wire	approx. 1,0 m, 4 mm <sup>2</sup>
Plug-in system	Plug/socket IP67

#### Limit values

System voltage	1000 VDC
NOCT (nominal operating cell temperature)*	45°C +/-2K
Max. load-carrying capacity	5400 N/m <sup>2</sup>
Reverse current feed IR	15,0 A
Permissible operating temperature	-40°C to 85°C / -40F to 185F

(No external voltages greater than Uoc may be applied to the module)

\* NOCT, irradiance 800 W/m<sup>2</sup>; AM 1,5; wind speed 1 m/s; Temperature 20°C

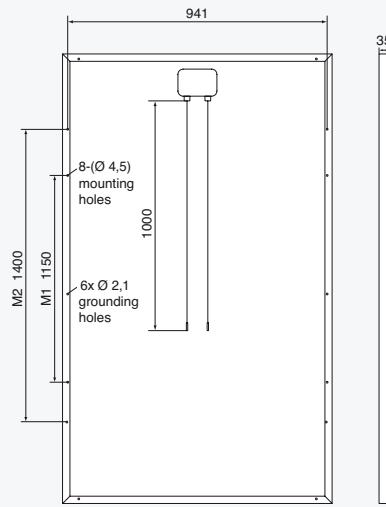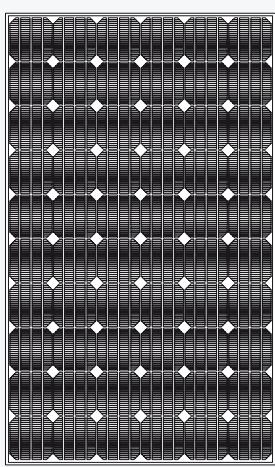

All dimensions in mm

#### Temperature coefficients

Voltage Uoc	-0,30 %/K
Current Isc	0,04 %/K
Output Pmpp	-0,40 %/K

#### Low-light performance (Example for AC-285M/156-60S)

I-U characteristic curve	Current Ipp	Voltage Upp
200 W/m <sup>2</sup>	1,86 A	30,10 V
400 W/m <sup>2</sup>	3,74 A	30,30 V
600 W/m <sup>2</sup>	5,50 A	31,00 V
800 W/m <sup>2</sup>	7,28 A	31,40 V
1000 W/m <sup>2</sup>	9,09 A	31,59 V