



AC-350M/156-72S
AC-355M/156-72S
AC-360M/156-72S

AXIpremium X

72 cell monocrystalline
High performance photovoltaic module


The advantages:

- 12** Years 12 years manufacturer's warranty
- P-Max** Highest performance due to specifically selected technologies and materials
- Wp** Guaranteed positive power tolerance from 0-5 Wp by individual measurement
- 2.400 Pa** Maximum 2400 Pa snow load
- 100%** 100% electroluminescence inspection
- IP 67** High quality junction box and connector systems



Exclusive linear AXITEC high performance guarantee!

- 15 years manufacturer's guarantee on 90% of the nominal performance
- 25 years manufacturer's guarantee on 85% of the nominal performance

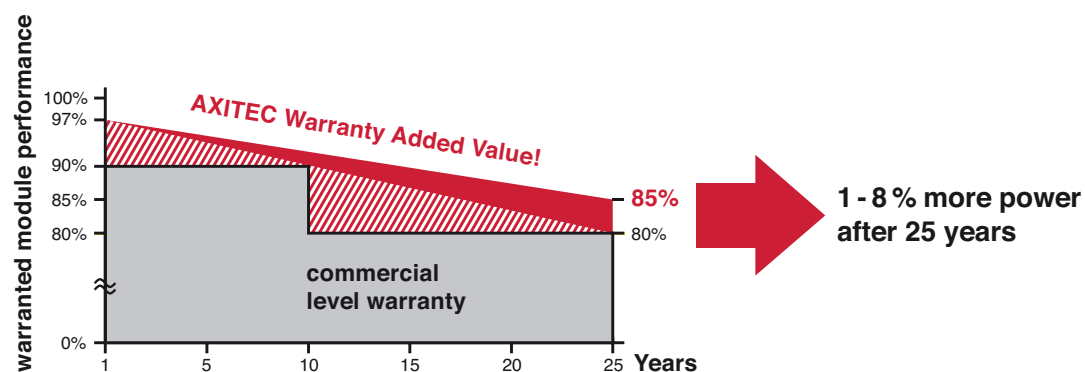

AXIpremium X

AC-350M/156-72S
AC-355M/156-72S
AC-360M/156-72S

www.axitecsolar.com

AXITEC
high quality german solar brand

Distributed by:



Electrical data (at standard conditions (STC) irradiance 1000 watt/m², spectrum AM 1,5 at a cell temperature of 25°C)

Type	Nominal output P _{mpp}	Nominal voltage U _{mpp}	Nominal current I _{mpp}	Short circuit current I _{sc}	Open circuit voltage U _{oc}	Module conversion efficiency
AC-350M/156-72S	350 Wp	38,20 V	9,16 A	9,56 A	46,70 V	17,95 %
AC-355M/156-72S	355 Wp	38,30 V	9,27 A	9,64 A	46,80 V	18,20 %
AC-360M/156-72S	360 Wp	38,45 V	9,38 A	9,77 A	47,00 V	18,46 %

Design


Frontside	3,2 mm hardened, low-reflection white glass
Cells	72 monocrystalline high efficiency cells 156 mm x 156 mm (6")
Backside	Composite film
Frame	40 mm silver anodized aluminium frame

Mechanical data

L x W x H	1966 x 992 x 40 mm
Weight	23,1 kg with frame

Power connection

Socket	Protection Class IP67 (3 bypass diodes)
Wire	approx. 1,1 m, 4 mm ²
Plug-in system	Plug/socket IP67

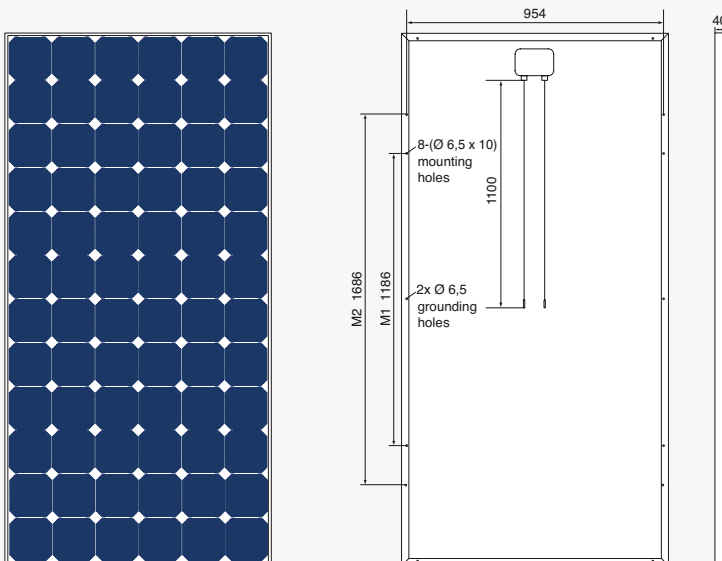

All dimensions in mm

Limit values

System voltage	1000 VDC
NOCT (nominal operating cell temperature)*	45°C +/-2K
Max. load-carrying capacity	2400 N/m ²
Reverse current feed IR	16,0 A
Permissible operating temperature	-40°C to 85°C / -40F to 185F

(No external voltages greater than U_{oc} may be applied to the module)

* NOCT, irradiance 800 W/m²; AM 1,5; wind speed 1 m/s; Temperature 20°C

Temperature coefficients

Voltage U _{oc}	-0,30 %/K
Current I _{sc}	0,04 %/K
Output P _{mpp}	-0,40 %/K

Low-light performance (Example for AC-360M/156-72S)

I-U characteristic curve	Current I _{pp}	Voltage U _{pp}
200 W/m ²	2,00 A	37,55 V
400 W/m ²	3,72 A	37,66 V
600 W/m ²	5,60 A	37,75 V
800 W/m ²	7,50 A	37,88 V
1000 W/m ²	9,38 A	38,45 V

Packaging

Module pieces per pallet	25 Stck.
Module pieces per HC-container	550 Stck.