



Residential BESS

Stackable type -Force series



Safety

Multi-protection from self developed BMS



Optimal Electricity Cost

Long cycle life and superior performance



Compact Size & East Installation

Module design help for quick installation



Easy to Scale Up

Be workable to be parallel based on 48V



Compatibility



Compatible with Tier 1 inverter brands

PYLON

How to save bill from Residential ESS?

1. Self-Consumption Optimization

High energy demand in the morning and evening but solar generation is most sufficient during the Mid-Day. Battery Storage system balance the feeding and demands. Realize your grid independence.

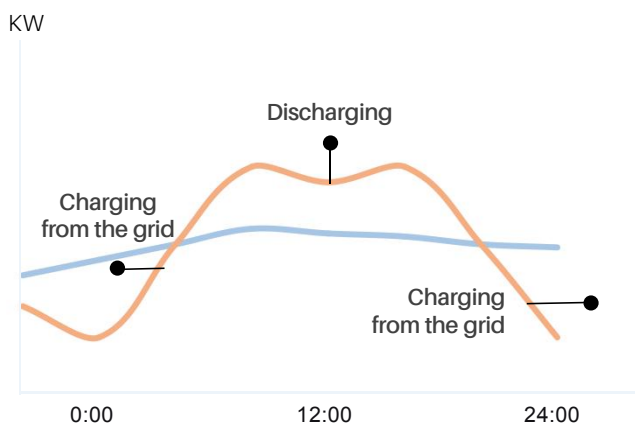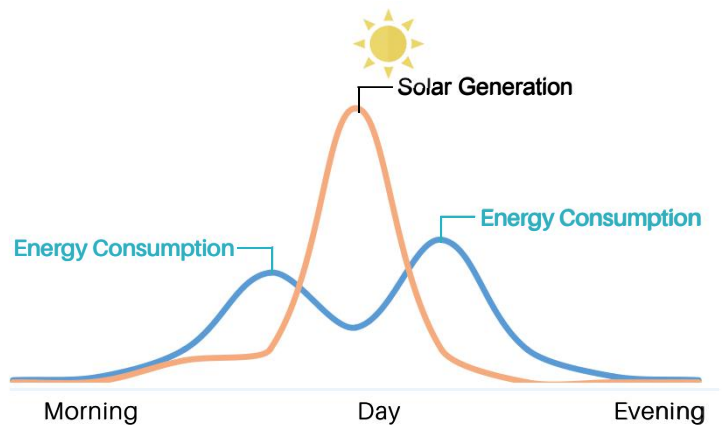

2. Benefits from Peak Shaving

House: Load Shifting

Store the power during low-peak and use the energy at peak-time. Save the money which happens arising from peak rate.


Transmission&Distribution: peak Shaving

Save on the electricity bills by reducing peak demand

3. VPP Revenue

VPP creates a network of renewable energy sources and battery storage systems, connected through a cloud-based technology that manages the stability of clean electricity to maximize your revenue.

Enabling a cost reduction, as well as boosting the system's efficiency

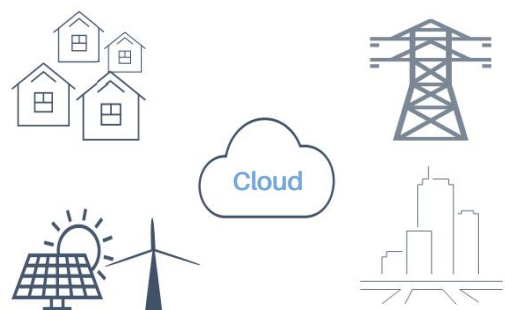

SPECIFICATION- (48V)

(Force-L1)



Module

2

3

4

5

6

7

Basic Parameters

Battery System Capacity(kWh)	7.1	10.65	14.21	17.76	21.31	24.86	
Voltage Range(Vdc)	44.5~54						
Dimension(W*D*H mm)	600*380*530	600*380*700	600*380*870	600*380*1040	600*380*1210	600*380*1380	
Weight(kg)	84	119	154	189	224	259	
Depth of Discharge	95%						
Charge/ Discharge Current(A)	(Recommend)	30	45	60	75	90	100
	(Max)	75	100	100	100	100	100
	(Peak @15s)	105	105	105	105	105	105
Communication Port	RS485 , CAN						
Protection Class	IP55						
Working Temperature/ °C	0~50						
Shelf Temperature/ °C	-20~60						
Humidity	5%~95%(w/o condensing)						
Altitude	< 2000						
Design Life	15+ Years (25°C/°F)						
Cycle Life	>6000, 25°C						
Authentication level	VDE2510-50/IEC62619/IEC62477/IEC62040/CE/UN38.3						

SPECIFICATION- (48V)

(Force-L2)



Module	2	3	4	
Basic Parameters				
Battery System Capacity(kWh)	7.1	10.65	14.21	
Voltage Range(Vdc)	44.5~54			
Dimension(W*D*H mm)	450*300*820	450*300*1120	450*300*1410	
Weight(kg)	83	119	14.21	
Depth of Discharge	95%			
Charge/ Discharge Current(A)	(Recommend)	30	45	60
	(Max)	75	100	100
	(Peak @15s)	105	105	105
Communication Port	RS485/CAN			
Protection Class	IP55			
Working Temperature/ °C	0~50			
Shelf Temperature/ °C	-20~60			
Humidity	5%~95% (w/o condensing)			
Altitude	< 2000			
Design Life	15+ Years (25°C/°F)			
Cycle Life	>6000, 25°C			
Authentication level	VDE2510-50/IEC62619/IEC62477/IEC62040/CE/UN38.3			

SPECIFICATION (96~336 V)

(Force-H1/H2)



Basic Parameters		Force-H1	Force-H2
Battery Module		FH48074	FH9637M
Battery Module Voltage(Vdc)		48	96
Battery Module Capacity(Ah)		74	37
Battery Module Qty. (Optional)		3~7 pcs	2~4 pcs
Battery System Capacity(kWh)		24.86	14.21
Battery System Voltage (V)		336	384
Dimension (W*D*H mm)		600*380*1380	450*296*1415
Weight(kg)		259	155
Depth of Discharge		95%	
Charge/ Discharge Current(A)	(Recommend)	37	18.5
	(Max.)	40	
Communication		RS485, CAN	
Protection Class		IP55	
Working Temperature/ °C		0~50	
Shelf Temperature/ °C		-20~60	
Humidity		5%~95%(w/o condensing)	
Altitude		< 2000	
Design Life		15+ Years (25°C/°F)	
Cycle Life		>6000, 25°C	
Authentication level		UL1973/VDE2510-50 /IEC62619/IEC62477/ IEC62040/CE/UN38.3	VDE2510-50/IEC62619 /IEC62477/ IEC62040 /CE/UN38.3

Pylon Technologies Co., Ltd
No. 73, Lane 887, Zu Chongzhi Road,
Zhangjiang Hi-Tech Park
Pudong, Shanghai
201203, China

www.pylontech.com
sales@pylontech.com.cn



Pylontech, Cube the force
www.pylontech.com.cn sales@pylontech.com.cn