



AC-350M/156-72S  
AC-355M/156-72S  
AC-360M/156-72S

[www.axitecsolar.com](http://www.axitecsolar.com)

**AXITEC**  
high quality german solar brand

## AXIpremium

72 cell monocrystalline  
High performance solar module


### The advantages:

- 15 Years** 15 years manufacturer's warranty
- P-Max** Highest performance due to specifically selected technologies and materials
- + W<sub>p</sub>** Guaranteed positive power tolerance from 0-5 Wp by individual measurement
- 2.400 Pa** Maximum 2400 Pa snow load
- 100%** 100% electroluminescence inspection
- IP 67** High quality junction box and connector systems



### Exclusive linear AXITEC high performance guarantee!

- 15 years manufacturer's guarantee on 90% of the nominal performance
- 25 years manufacturer's guarantee on 85% of the nominal performance

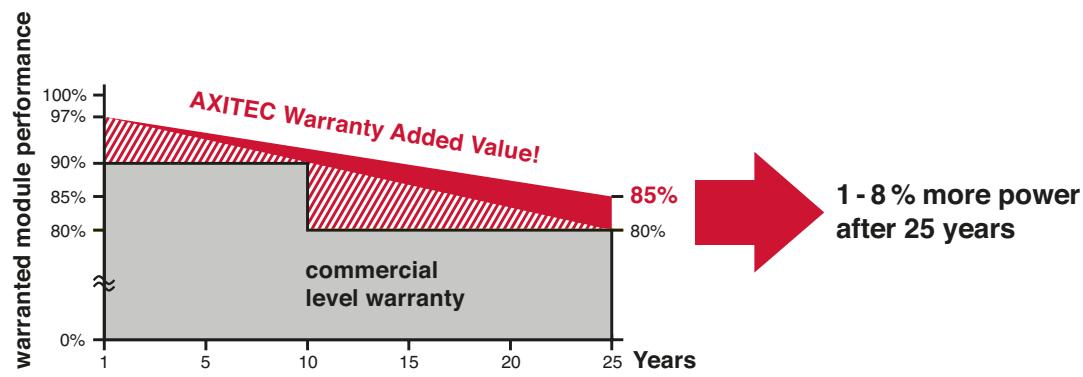

# AXIpremium

**AC-350M/156-72S  
AC-355M/156-72S  
AC-360M/156-72S**

[www.axitecsolar.com](http://www.axitecsolar.com)

**AXITEC**  
high quality german solar brand

Distributed by:



**Electrical data** (at standard conditions (STC) irradiance 1000 watt/m<sup>2</sup>, spectrum AM 1,5 at a cell temperature of 25°C)

Type	Nominal output Pmpp	Nominal voltage Umpp	Nominal current Impp	Short circuit current Isc	Open circuit voltage Uoc	Module conversion efficiency
AC-350M/156-72S	350 Wp	38,20 V	9,16 A	9,56 A	46,70 V	18,04 %
AC-355M/156-72S	355 Wp	38,30 V	9,27 A	9,64 A	46,80 V	18,30 %
AC-360M/156-72S	360 Wp	38,45 V	9,38 A	9,77 A	47,00 V	18,55 %

#### Design



Frontside	3,2 mm hardened, low-reflection white glass
Cells	72 monocrystalline high efficiency cells 156 mm x 156 mm (6")
Backside	Composite film
Frame	40 mm silver anodized aluminium frame

#### Mechanical data

L x W x H	1956 x 992 x 40 mm
Weight	23,0 kg with frame

#### Power connection

Socket	Protection Class IP67 (3 bypass diodes)
Wire	approx.1,1 m, 4 mm <sup>2</sup>
Plug-in system	Plug/socket IP67

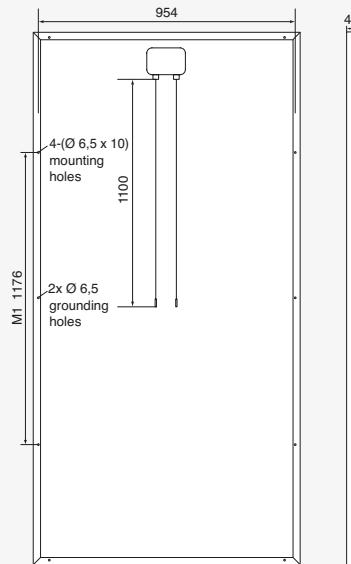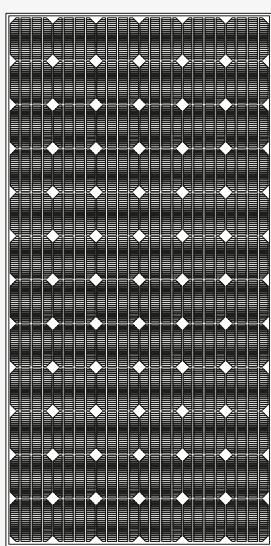

All dimensions in mm

#### Limit values

System voltage	1000 VDC
NOCT (nominal operating cell temperature)*	45°C +/-2K
Max. load-carrying capacity	2400 N/m <sup>2</sup>
Reverse current feed IR	16,0 A
Permissible operating temperature	-40°C to 85°C / -40F to 185F

(No external voltages greater than Uoc may be applied to the module)

\* NOCT, irradiance 800 W/m<sup>2</sup>; AM 1,5; wind speed 1 m/s; Temperature 20°C

#### Temperature coefficients

Voltage Uoc	-0,30 %/K
Current Isc	0,04 %/K
Output Pmpp	-0,40 %/K

#### Low-light performance (Example for AC-360M/156-72S)

I-U characteristic curve	Current Ipp	Voltage Upp
200 W/m <sup>2</sup>	2,00 A	37,55 V
400 W/m <sup>2</sup>	3,72 A	37,66 V
600 W/m <sup>2</sup>	5,60 A	37,75 V
800 W/m <sup>2</sup>	7,50 A	37,88 V
1000 W/m <sup>2</sup>	9,38 A	38,45 V

#### Packaging

Module pieces per pallet	25 Stck.
Module pieces per HC-container	600 Stck.