

Tiger Neo N-type

54HL4-B

425 Watt

ALL-BLACK MODULE

N-Type

Positive power tolerance of 0~+3%

IEC61215(2016), IEC61730(2016)

ISO9001:2015: Quality Management System

ISO14001:2015: Environment Management System

ISO45001:2018

Occupational health and safety management systems



Key Features



SMBB Technology

Better light trapping and current collection to improve module power output and reliability.



Hot 2.0 Technology

The N-type module with Hot 2.0 technology has better reliability and lower LID/LETID.



PID Resistance

Excellent Anti-PID performance guarantee via optimized mass-production process and materials control.



Enhanced Mechanical Load

Certified to withstand: wind load (2400 Pascal) and snow load (5400 Pascal).




Durability Against Extreme Environmental Conditions

High salt mist and ammonia resistance.



POSITIVE QUALITY™
Continuous Quality Assurance

LINEAR PERFORMANCE WARRANTY


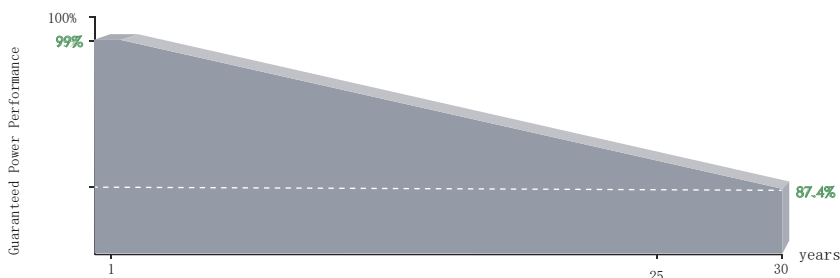


25 Year Product Warranty

30 Year Linear Power Warranty

0.40% Annual Degradation Over 30 years

Engineering Drawings

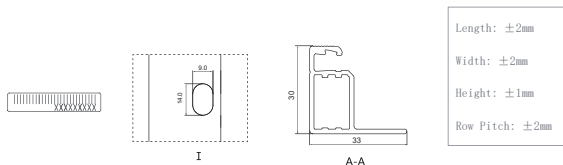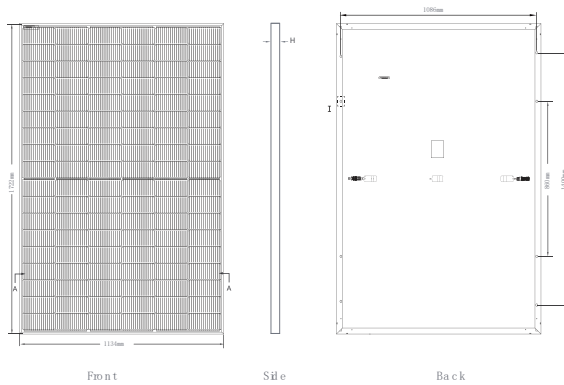


Packaging Configuration

(Two pallets = One stack)

36pcs/pallets, 72pcs/stack, 936pcs/ 40' HQ Container

Electrical Performance & Temperature Dependence

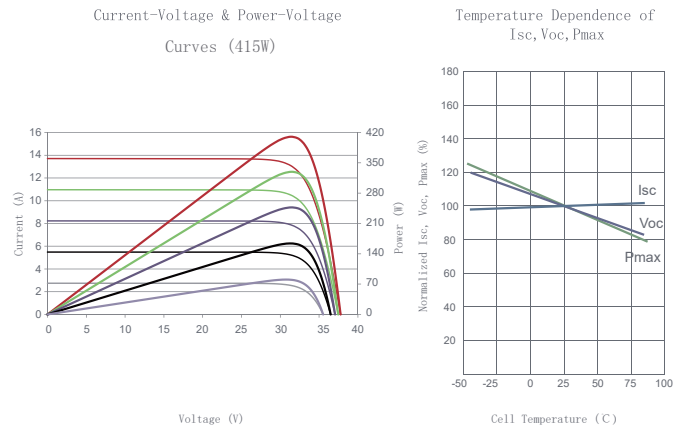

Mechanical Characteristics

Cell Type	N type Mono-crystalline
No. of cells	108 (6×18)
Dimensions	1722×1134×30mm (67.79×44.65×1.18 inch)
Weight	22 kg (48.50 lbs)
Front Glass	3.2mm, Anti-Reflection Coating, High Transmission, Low Iron, Tempered Glass
Frame	Anodized Aluminium Alloy
Junction Box	IP68 Rated
Output Cables	TUV 1×4.0mm ² (+): 400mm, (-): 200mm or Customized Length

SPECIFICATIONS

Module Type	JKM425N-54HL4-B	
	STC	NOCT
Maximum Power (Pmax)	425Wp	320Wp
Maximum Power Voltage (Vmp)	32.37V	30.19V
Maximum Power Current (Imp)	13.13A	10.60A
Open-circuit Voltage (Voc)	38.95V	37.00V
Short-circuit Current (Isc)	13.58A	10.96A
Module Efficiency STC (%)	21.76%	
Operating Temperature(°C)	-40°C~+85 °C	
Maximum system voltage	1000VDC (IEC)	
Maximum series fuse rating	25A	
Power tolerance	0~+3%	
Temperature coefficients of Pmax	-0.29%/°C	
Temperature coefficients of Voc	-0.25%/°C	
Temperature coefficients of Isc	0.045%/°C	
Nominal operating cell temperature (NOCT)	45±2°C	

*STC: Irradiance 1000W/m² Cell Temperature 25° C AM=1.5
 NOCT: Irradiance 800W/m² Ambient Temperature 20° C AM=1.5 Wind Speed 1m/s