



## 270 - 290 Wp

## AXIpower HC

120 halfcell polycrystalline  
High performance solar module


The advantages:

- 15** Years 15 years manufacturer's warranty
- HC** Highest module performance through Half-Cut-technology and tested materials
- Wp** Guaranteed positive power tolerance from 0-5 Wp by individual measurement
- 5.400 Pa** Maximum 5400 Pa snow load
- 100%** 100% electroluminescence inspection
- Soft Grip** High stability due to AXITEC-Soft-Grip-Seam aluminium frame construction
- IP 68** High quality junction box and connector systems



### Exclusive linear AXITEC high performance guarantee!

- 15 years manufacturer's guarantee on 90% of the nominal performance
- 25 years manufacturer's guarantee on 85% of the nominal performance

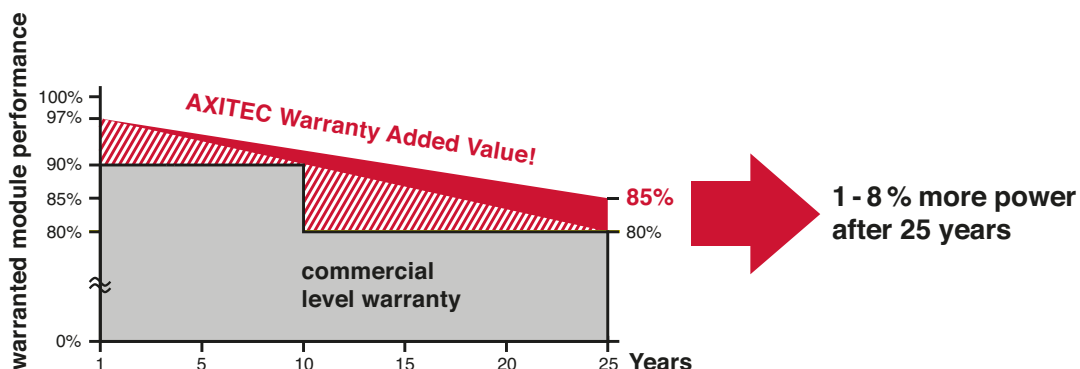

## AXIpower HC 270 - 290 Wp

**Electrical data** (at standard conditions (STC) irradiance 1000 watt/m<sup>2</sup>, spectrum AM 1,5 at a cell temperature of 25°C)

Type	Nominal output P <sub>mpp</sub>	Nominal voltage U <sub>mpp</sub>	Nominal current I <sub>mpp</sub>	Short circuit current I <sub>sc</sub>	Open circuit voltage U <sub>oc</sub>	Module conversion efficiency
AC-270PH/60S	270 Wp	31,26 V	8,64 A	9,15 A	38,31 V	16,25 %
AC-275PH/60S	275 Wp	31,47 V	8,74 A	9,24 A	38,50 V	16,55 %
AC-280PH/60S	280 Wp	31,67 V	8,85 A	9,33 A	38,69 V	16,85 %
AC-285PH/60S	285 Wp	31,87 V	8,96 A	9,42 A	38,88 V	17,15 %
AC-290PH/60S	290 Wp	32,06 V	9,05 A	9,51 A	39,07 V	17,45 %

### Design

Frontside	3,2 mm hardened, low-reflection white glass
Cells	120 polycrystalline high efficiency cells
	156,75 mm x 78,38 mm
Backside	Composite film
Frame	35 mm silver anodized aluminium frame

### Mechanical data

L x W x H	1675 x 992 x 35 mm
Weight	18,5 kg with frame

### Power connection

Socket	Protection Class IP68
Wire	approx. 1,2 m, 4 mm <sup>2</sup>
Plug-in system	Plug/socket IP68

### Limit values

System voltage	1000 VDC
NOCT (nominal operating cell temperature)*	45°C +/-2K
Max. load-carrying capacity	5400 N/m <sup>2</sup>
Reverse current feed IR	20,0 A
Permissible operating temperature	-40°C to 85°C / -40F to 185F

(No external voltages greater than U<sub>oc</sub> may be applied to the module)

\* NOCT, irradiance 800 W/m<sup>2</sup>; AM 1,5;  
wind speed 1 m/s; Temperature 20°C

### Temperature coefficients

Voltage U <sub>oc</sub>	-0,30 %/K
Current I <sub>sc</sub>	0,04 %/K
Output P <sub>mpp</sub>	-0,40 %/K


### Low-light performance

 (Example for AC-280PH/60S)

I-U characteristic curve	Current I <sub>pp</sub>	Voltage U <sub>pp</sub>
200 W/m <sup>2</sup>	1,86 A	31,13 V
400 W/m <sup>2</sup>	3,43 A	31,20 V
600 W/m <sup>2</sup>	5,71 A	31,23 V
800 W/m <sup>2</sup>	7,20 A	31,42 V
1000 W/m <sup>2</sup>	8,85 A	31,67 V

### Packaging

Module pieces per pallet	30
Module pieces per HC-container	780

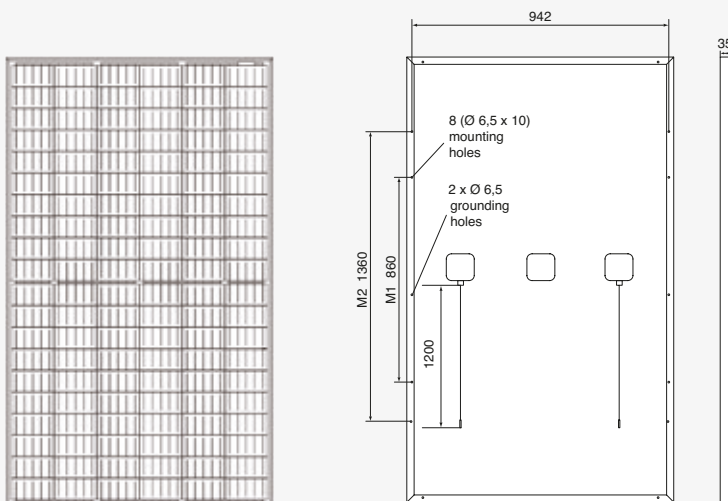

All dimensions in mm