



**530 - 555 Wp**

## AXIpremium XXL HC

High performance solar module  
144 halfcell, monocrystalline



German-Australian-Engineering

The advantages:



15 years Manufacturer's warranty



High module performance through Half-Cut-technology and selected materials



Guaranteed positive selection tolerance from 0-5 Wp by individual measurement



100% visual electroluminescence inspection in production



High stability due to innovative frame design




High quality junction box and connector systems



**Exclusive linear AXITEC high performance guarantee!**

- 15 years manufacturer's guarantee on 90 % of the nominal performance
- 25 years manufacturer's guarantee on 85 % of the nominal performance

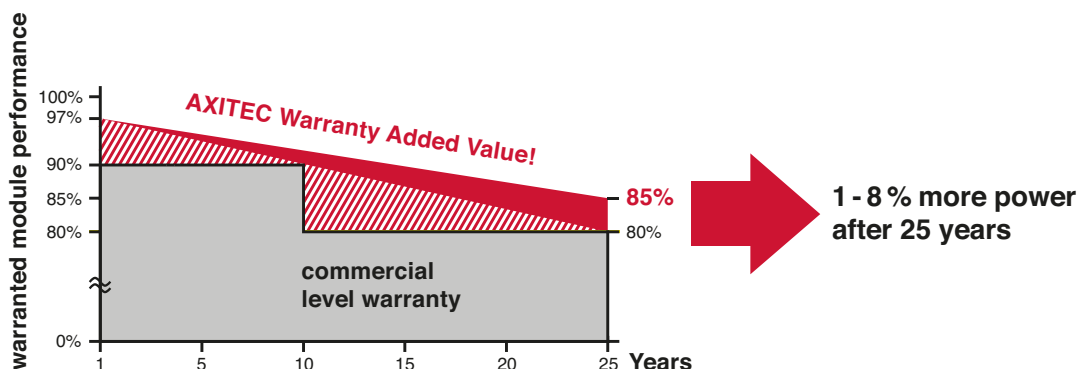

## AXIpremium XXL HC 530 - 555 Wp

**Electrical data** (at standard conditions (STC) irradiance 1000 watt/m<sup>2</sup>, spectrum AM 1.5 at a cell temperature of 25°C)

Type	Nominal output P <sub>mpp</sub> (± 3 %)	Nominal voltage U <sub>mpp</sub> (± 2 %)	Nominal current I <sub>mpp</sub> (± 2 %)	Short circuit current I <sub>sc</sub> (± 2 %)	Open circuit voltage U <sub>oc</sub> (± 2 %)	Module conversion efficiency
AC-530MH/144VAU	530 Wp	41.40 V	12.81 A	13.73 A	49.25 V	20.51 %
AC-535MH/144VAU	535 Wp	41.55 V	12.88 A	13.79 A	49.40 V	20.70 %
AC-540MH/144VAU	540 Wp	41.70 V	12.95 A	13.85 A	49.55 V	20.89 %
AC-545MH/144VAU	545 Wp	41.85 V	13.03 A	13.91 A	49.70 V	21.09 %
AC-550MH/144VAU	550 Wp	42.00 V	13.10 A	13.97 A	49.85 V	21.28 %
AC-555MH/144VAU	555 Wp	42.15 V	13.17 A	14.02 A	50.00 V	21.48 %

### Design

Frontside	3.2 mm hardened, low-reflection white glass
Cells	144 monocrystalline high efficiency cells
Backside	Composite film
Frame	35 mm silver aluminium frame

### Mechanical data

L x W x H	2279 x 1134 x 35 mm
Weight	28.5 kg with frame



### Mechanical load

Design load (pressure/suction)	3600 Pa / 1600 Pa *
Test load (pressure/suction)	5400 Pa / 2400 Pa *

\* depending on the mounting situation in accordance to the manual

### Power connection

Socket	Protection Class IP68
Wire	approx. 1.3 m, 4 mm <sup>2</sup>
Plug-in system	Plug/socket IP68, Stäubli MC4 PV-KST4-EVO 2 / PV-KBT4-EVO 2

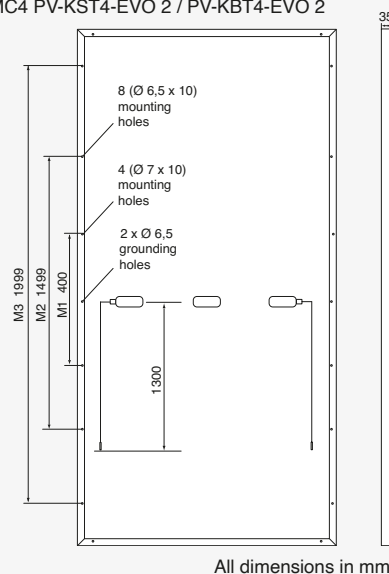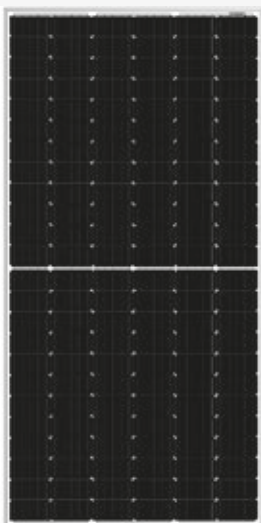

### Limit values

System voltage	1500 VDC
Module Fire Performance	CLASS C
NOCT (nominal operating cell temperature)*	45°C +/-2K
Reverse current feed IR	25.0 A

Permissible operating temperature	-40°C to 85°C / -40F to 185F
-----------------------------------	------------------------------

(No external voltages greater than U<sub>oc</sub> may be applied to the module)

\* NOCT, irradiance 800 W/m<sup>2</sup>; AM 1.5; wind speed 1 m/s; Temperature 20°C

### Temperature coefficients

Voltage U <sub>oc</sub>	-0.28 %/K
Current I <sub>sc</sub>	0.045 %/K
Output P <sub>mpp</sub>	-0.35 %/K

### Low-light performance

 (Example for AC-555MH/144VAU)

I-U characteristic curve	Current I <sub>mpp</sub>	Voltage U <sub>mpp</sub>
200 W/m <sup>2</sup>	2.69 A	40.57 V
400 W/m <sup>2</sup>	5.43 A	41.03 V
600 W/m <sup>2</sup>	8.11 A	41.35 V
800 W/m <sup>2</sup>	10.73 A	41.71 V
1000 W/m <sup>2</sup>	13.17 A	42.15 V

### Packaging

Module pieces per pallet	31
Module pieces per HC-container	620

country of origin:  
made in People's Republic of China