
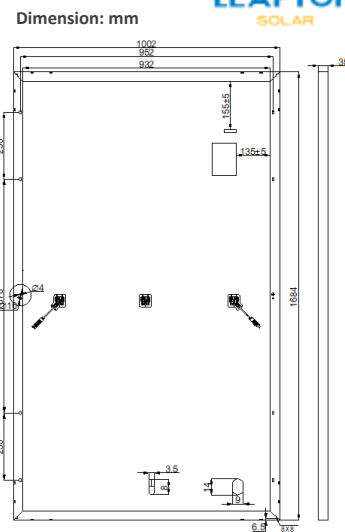


Mono

Poly

## LP156\*156-M-60-H

### Rated Power 325-345W

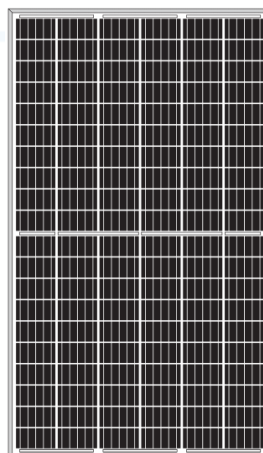

Product Series	LP156*156-M-60-H				
Power	325W	330W	335W	340W	345W
Open Circuit Voltage	41.10V	41.30V	41.50V	41.70V	41.90V
Short Circuit Current	10.20A	10.24A	10.36A	10.47A	10.57A
Maximum Power Voltage	33.60V	33.81V	34.00V	34.20V	34.40V
Maximum Power Current	9.68A	9.76A	9.85A	9.94A	10.03A
Module Efficiency	19.3%	19.6%	19.9%	20.1%	20.4%

Product Characteristics			
Weight	19kg	Junction Box	IP68
Module Size	1684*1002*35mm	Frame	Aluminum Alloy
Cell Amount	60*2 pcs	Cable	4mm <sup>2</sup> , Custom or Length: "+" 300mm/ "-" 150
Cell Size	158.75*79.38mm	Connection	MC4 compatible
Maximum System Voltage	1000/1500V	Application Level	Class A

Packing Configuration			
Modules/Pallet	30 pieces	Modules/40' container	780 pieces
Packing Description	26 Pallets, Total=30 X26=780		

Temperature Characteristics		Maximum Rating	
NOCT	45±2°C	Output Tolerance	0~+5W
Temp Coefficient of ISC	+0.05%/°C	Operating Temperature	-40°C ~+85°C
Temp Coefficient of VOC	-0.28%/°C	Wind Load/Snow Load	2400pa/5400pa
Temp Coefficient of Pmax	-0.36%/°C	Fuse Current	15A

**15** Years  
Quality Warranties

**25** Years  
Power Guarantee

•10-YEAR 90% Maximum Output  
•25-YEAR 80% Maximum Output

**J-PEC** • J-PEC Product


• Salt Spray Certificate  
• IEC61701  
(Salt Mist Corrosion Test)

• TUV PID Certificate

• TUV Certificate

**325W**  
~  
**345W** • Output 325W-345W

Current - Voltage Curve at Various Light Levels

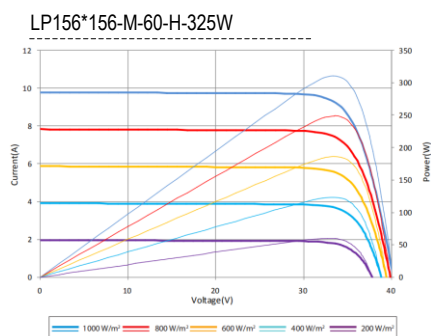

Output at Various Temperatures

