

SG125HV

String Inverter for 1500 Vdc System



High Yield



- Patent five-level topology, max. efficiency 98.9 %, European efficiency 98.7 %, CEC efficiency 98.5 %
- Full power operation without derating at 50 °C

Easy O&M



- Virtual central solution, easy for O&M
- Compact design and light weight for easy installation

Saved Investment




- DC 1500 V, AC 600 V, low system initial investment
- 1 to 5 MW power block design for lower MV transformer and labor cost
- Max. DC/AC ratio up to 1.5

Grid Support




- Compliance with both IEC and UL safety, EMC and grid support regulations
- Low/High voltage ride through (L/HVRT)
- Active & reactive power control and power ramp rate control

Circuit Diagram

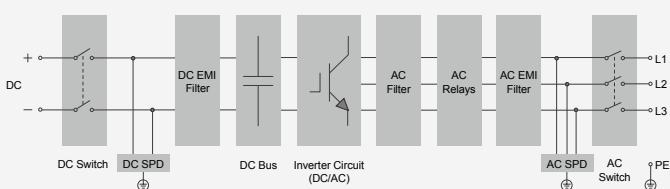

Efficiency Curve

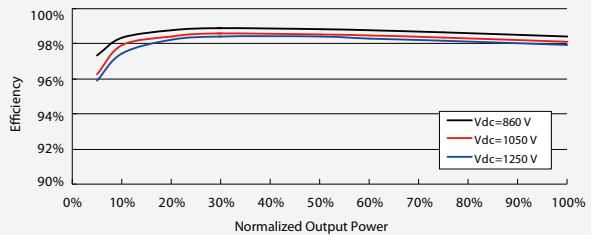

Input (DC)		SG125HV
Max. PV input voltage	1500 V	
Min. PV input voltage / Startup input voltage	860 V / 920 V	
Nominal input voltage	1050 V	
MPP voltage range	860 – 1450 V	
MPP voltage range for nominal power	860 – 1250 V	
No. of independent MPP inputs	1	
No. of DC inputs	1	
Max. PV input current	148 A	
Max. DC short-circuit current	240 A	
Output (AC)		
AC output power	125000 VA @ 50 °C	
Max. AC output current	120 A	
Nominal AC voltage	3 / PE, 600 V	
AC voltage range	480 – 690 V	
Nominal grid frequency / Grid frequency range	50 Hz / 45 – 55 Hz, 60 Hz / 55 – 65 Hz	
THD	< 3 % (at nominal power)	
DC current injection	< 0.5 % In	
Power factor at nominal power / Adjustable power factor	> 0.99 / 0.8 leading – 0.8 lagging	
Feed-in phases / Connection phases	3 / 3	
Efficiency		
Max. efficiency / Euro. efficiency / CEC efficiency	98.9 % / 98.7 % / 98.5 %	
Protection		
DC reverse connection protection	Yes	
AC short-circuit protection	Yes	
Leakage current protection	Yes	
Grid monitoring	Yes	
DC switch / AC switch	Yes / Yes	
Oversupply protection	DC Type II / AC Type II	
General Data		
Dimensions (W*H*D)	670*902*296 mm	26.4"**35.5"**11.7"
Weight	76 kg	167.5 lb
Isolation method	Transformerless	
Degree of protection	IP 65	
Night power consumption	< 4 W	
Operating ambient temperature range	-25 to 60 °C (> 50 °C derating)	
Allowable relative humidity range (non-condensing)	-13 to 140 °F (> 122 °F derating)	
Cooling method	0 – 100 %	
Max. operating altitude	Smart forced air cooling	
Display / Communication	4000 m (> 3000 m derating)	
DC connection type	13123 ft (> 9843 ft derating)	
AC connection type	LED, Bluetooth+APP / RS485	
Compliance	OT or DT terminal (Max. 185 mm ²	
Grid support	350 Kcmil)	
Type designation	OT or DT terminal (Max. 185 mm ²	
	350 Kcmil)	
	CE, IEC 62109-1-2, IEC 61000-6-2/-4, IEC 61727, IEC 62116, IEC 61000-3-11-12, UL 1741, UL 1741 SA, IEEE 1547, IEEE 1547.1, CSA C22.2 107.1-01 and California Rule 21	
	LVRT, HVRT, active & reactive power control and power ramp rate control	
	SG125HV-10	

