




Quality. Performance. Value.

PERC MONO CRYSTALLINE MODULE -----ULTRA BLACK

DM300-M156-60UB

285 / 290 / 295 / 300

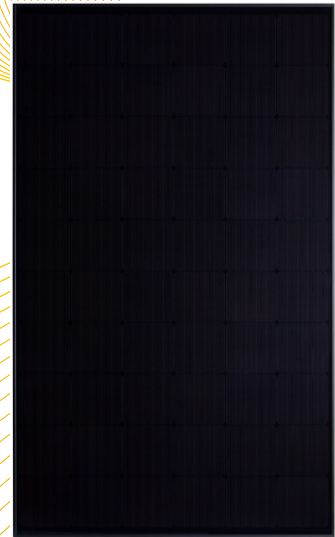

Technology

High module conversion efficiency through superior manufacturing technology



PID Free

Excellent PID resistance according to IEC TS 62804-1



Power-Positive Tolerance

Guaranteed power output(0/+3%)



Performance

High performance under low light conditions (Cloudy days, mornings and evenings)



Quality

Manufactured according to International Quality and Environmental Management Systems (ISO9001, ISO14001)



Value

Our vertically integrated business model allows for competitive pricing and great value

www.dmegcsolar.com

Superior Manufacturing-Quality Assurance




- All modules are manufactured using TQC & SPC quality control systems
- Advanced cell sorting to avoid electric mismatch
- 100% EL Test-before lamination & prior to shipment
- Comprehensive Safety and Reliability tests are performed

Power Output




- Our IP68 rated junction box improves module performance and stability
- High-performance connectors provide low resistance interconnection to ensure the full utilization of module output power

Warranty



- 10 Years Manufacturers Warranty
- Linear Power Output Warranty, no less than 80.2% at year 25th

Visible Quality



- Durable, high-quality
- Rigid construction: 5400Pa & 2400Pa rated assembly




Electrical Specifications

* STC irradiance of 1000W/m² spectrum AM 1.5 and cell temperature of 25°C

Module Type	Pm(W)	Tolerance	I _{mp} (A)	V _{mp} (V)	I _{sc} (A)	V _{oc} (V)	Module Efficiency
DM285-M156-60UB	285	0/+3%	8.74	32.66	9.14	40.42	17.41%
DM290-M156-60UB	290	0/+3%	8.84	32.85	9.24	40.58	17.72%
DM295-M156-60UB	295	0/+3%	8.94	33.04	9.34	40.74	18.02%
DM300-M156-60UB	300	0/+3%	9.05	33.19	9.44	40.90	18.33%


Mechanical Data

Cell Type	DMPD5B157-210
Cell Arrangement	60(6x10)
Module Structure	Glass/ EVA / Backsheet (black / inside black)
Glass Thickness	3.2mm
Application Class	Class A at IEC 61730
Junction Box Rating	IP 67 / IP 68
Cables	1000mm/4mm ²
Connector Type	MC4 / MC4 Compatible
Fire Rating Class	C

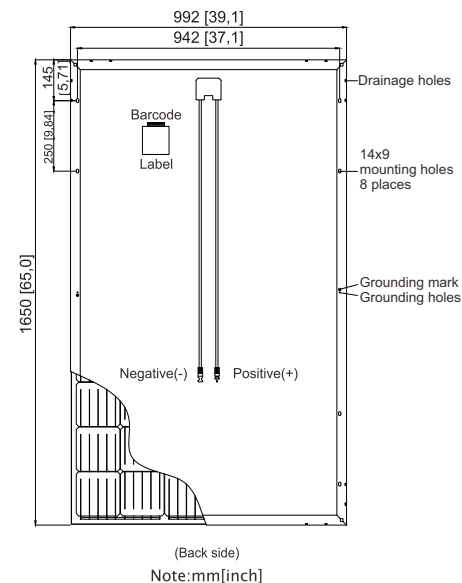

Maximum Ratings


Operating Temperature	-40°C to +85°C
Maximum Load Capacity	Snow 5400Pa / Wind 2400Pa
Maximum System Voltage	1000V DC(IEC)
Maximum Series Fuse Rating	20A
Number of Diodes	3

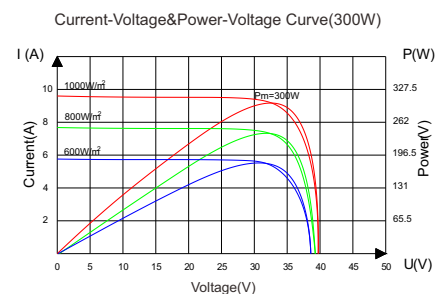

Packaging

*frame sizes(35mm/40mm) available upon request

Module Dimensions	1650x992x35mm	1650x992x40mm
Weight	18.2kg	19.0kg
Pallet Dimensions	1700x1130x1130mm	1700x1130x1130mm
Container	40' HQ	40' HQ
Pieces per Pallet	31	27
Pallets per Container	28	28
Pieces per Container	868	756
Gross Weight per Pallet	600kg	550kg
Gross Weight per Container	16800kg	15400kg

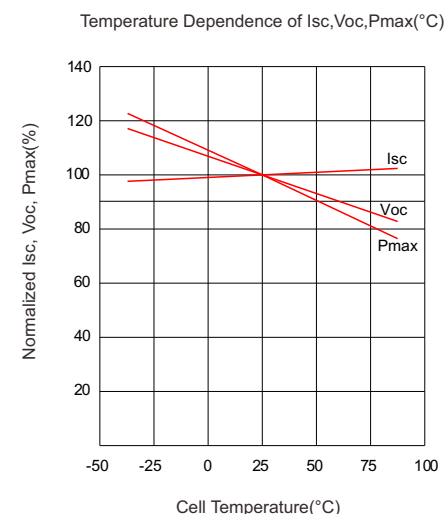

Temperature Characteristics

Nominal Module Operating Temperature (NMOT)	42°C±3°C
Temperature Coefficient of I _{sc}	+0.038%/°C
Temperature Coefficient of V _{oc}	-0.270%/°C
Temperature Coefficient of P _{max}	-0.365%/°C



Hengdian Group DMEGC Magnetics Co., Ltd.
Hengdian Industrial Zone, Dongyang City
Zhejiang Province, China 322118

Tel: 0086-579-8658-8825 Fax: 0086-579-8655-4845
Email: solar@dmegc.com.cn
www.chinadmegc.com www.dmegcsolar.com