

LG NeON[®]H BiFacial

The LG NeON[®]H BiFacial is one of the most powerful and versatile modules on the market today. The LG NeON[®]H BiFacial is designed to absorb sunlight from both the front and rear sides of its cells by using a transparent back sheet, providing up to 30% higher electricity production.

365W | 360W

FEATURES

Enhanced Performance Warranty

96.4%
in year 25

LG NeON[®]H BiFacial comes with an enhanced performance warranty. After 25 years of use, the LG NeON[®]H BiFacial is guaranteed to provide at least 96.4% of initial performance.

25
YEARS
WARRANTY

Industry-Leading Product Warranty

LG offers an industry-leading 25 year product warranty on the NeON[®]H BiFacial.



Reliable Quality


LG NeON[®]H BiFacial offers reliable and proven quality through rigorous testing*.



More Generation In Less Space

LG NeON[®]H BiFacial is designed for efficient use even in limited space thanks to its output-enhancing dual-side absorption of sunlight.

* LG is subject to rigorous quality verification through PVEL PQP test. The PVEL PQP includes test sequences examining both the reliability and performance characteristics of PV modules.

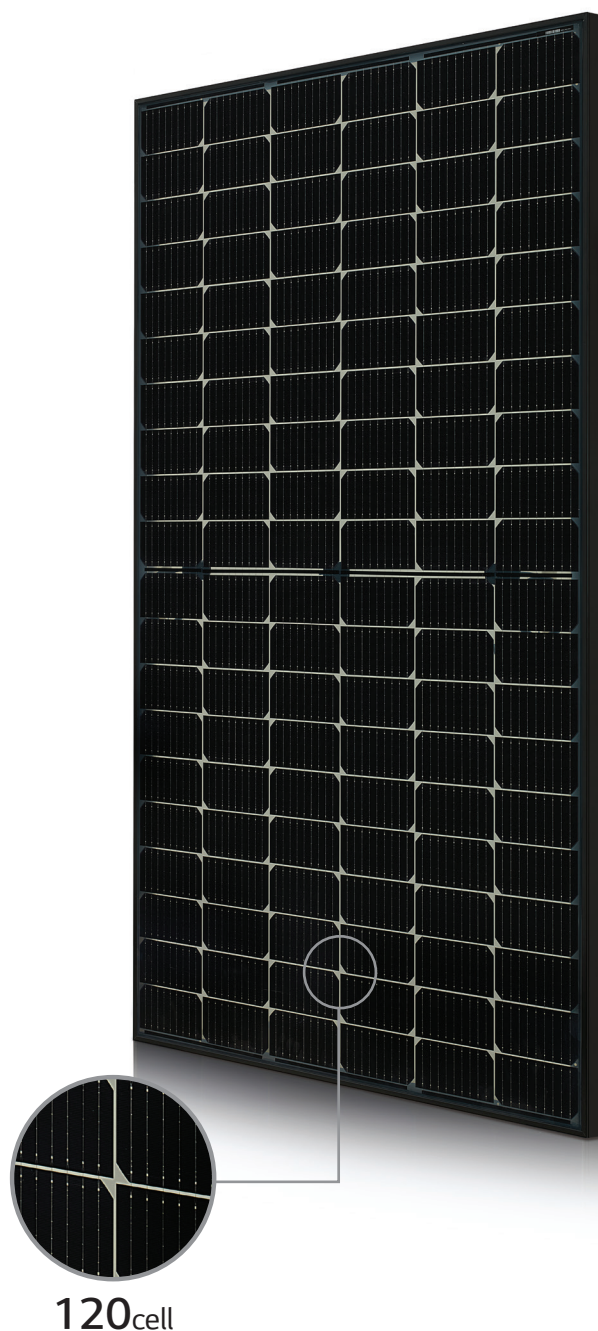

About LG Electronics

LG is transforming today's solar landscape, offering high-efficiency solar panels for customers who demand high performance, reliability and consistently strong energy yield from a brand they can trust. LG's modules feature high power outputs, outstanding durability, appealing aesthetics and high-efficiency technology.



LG NeON[®]H BiFacial

LG365N1T-E6 / LG360N1T-E6

Electrical Properties

Model	LG365N1T-E6			LG360N1T-E6			
	STC*	BiFi100**	BiFi200**	STC	BiFi100**	BiFi200**	
Maximum Power (Pmax)	[W]	365	390	415	360	385	410
MPP Voltage (Vmpp)	[V]	34.7	34.7	34.7	34.5	34.5	34.5
MPP Current (Impp)	[A]	10.54	11.24	11.96	10.46	11.16	11.88
Open Circuit Voltage (Voc, ± 5%)	[V]	41.3	41.3	41.3	41.2	41.2	41.2
Short Circuit Current (Isc, ± 5%)	[A]	11.08	11.82	12.58	10.98	11.71	12.47
Module Efficiency	[%]	19.8	21.2	22.5	19.5	20.9	22.3
Pmax Bifaciality Coefficient	[%]	70 ± 5					
Power Tolerance	[%]	0 - +3					

* STC (Standard Test Condition) : Irradiance 1,000W/m², Cell temperature 25°C, AM 1.5, Measure Tolerance : ± 3 %

** The electrical properties of BiFi100 and BiFi200 measure under the front side irradiance 1,000W/m² + (100W/m² or 200W/m²) * BiFi. Use 100W/m² for BiFi100 and 200W/m² for BiFi200.

Electrical Properties (NMOT)

Model	LG365N1T-E6			LG360N1T-E6			
	NMOT	BiFi100	BiFi200	NMOT	BiFi100	BiFi200	
Maximum Power (Pmax)	[W]	276	294	314	272	291	310
MPP Voltage (Vmpp)	[V]	32.6	32.6	32.6	32.5	32.5	32.5
MPP Current (Impp)	[A]	8.44	9.01	9.62	8.38	8.96	9.55
Open Circuit Voltage (Voc)	[V]	38.9	38.9	38.9	38.7	38.7	38.7
Short Circuit Current (Isc)	[A]	8.92	9.52	10.17	8.84	9.45	10.07

General Data

Cell Properties (Material / Type)	Monocrystalline / N-type
Cell Maker	LG
Cell Configuration	120 Cells (6 x 20)
Number of Busbars	9 EA
Module Dimensions (L x W x H)	1,768 x 1,042 x 40 mm
Weight	18.5 kg
Glass (Material)	Tempered Glass with AR coating
Backsheet (Color)	Transparent
Frame (Material)	Anodized Aluminium
Junction Box (Protection Degree)	IP 68 with 3 Bypass Diodes
Cables (Length)	1,200 mm x 2 EA
Connector (Type / Maker)	MC4 / Stäubli

Operating Conditions

Operating Temperature	[°C]	-40 ~ +85
Maximum System Voltage	[V]	1,000(IEC) / 1,000(UL)
Maximum Series Fuse Rating	[A]	20
Mechanical Test Load* (Front)	[Pa]	5,400
Mechanical Test Load* (Rear)	[Pa]	4,000

* Based on IEC 61215-2 : 2016 (Test Load = Design Load x Safety Factor(1.5))


Temperature Characteristics

NMOT*	[°C]	42 ± 3
Pmax	[%/°C]	-0.33
Voc	[%/°C]	-0.26
Isc	[%/°C]	0.04

* NMOT (Nominal Module Operating Temperature)

: Irradiance 800W/m², Ambient temperature 20°C, Wind speed 1m/s, Spectrum AM 1.5

I-V Curves

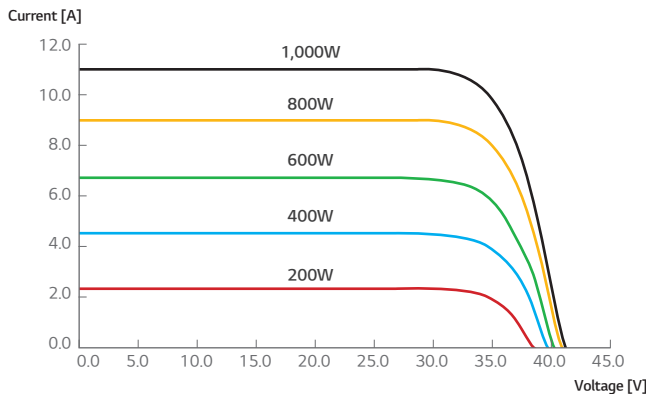

Certifications and Warranty


Certifications	IEC 61215-1 / -1-1 / 2:2016, IEC 61730-1 / 2:2016, UL 61730-1:2017, UL 61730-2:2017
	ISO 9001, ISO 14001
	OHSAS 18001
Salt Mist Corrosion Test	IEC 61701 : 2011 Severity 6
Ammonia Corrosion Test	IEC 62716 : 2013
Module Fire Performance	Type 1 (UL 61730)
Fire Rating	Class C (UL 790)
Solar Module Product Warranty	25 Years
Solar Module Output Warranty	Linear Warranty*

* Initial 107%, 1st year 105.4%, After 1st year : -0.35% / year, 96.4% for 25 years (Based on BiFi100)

Packaging Configuration

Number of Modules Per Pallet	[EA]	25
Number of Modules Per 40ft HQ Container	[EA]	650
Packaging Box Dimensions (L x W x H)	[mm]	1,810 x 1,120 x 1,213
Packaging Box Gross Weight	[kg]	498

Dimensions (mm/inch)

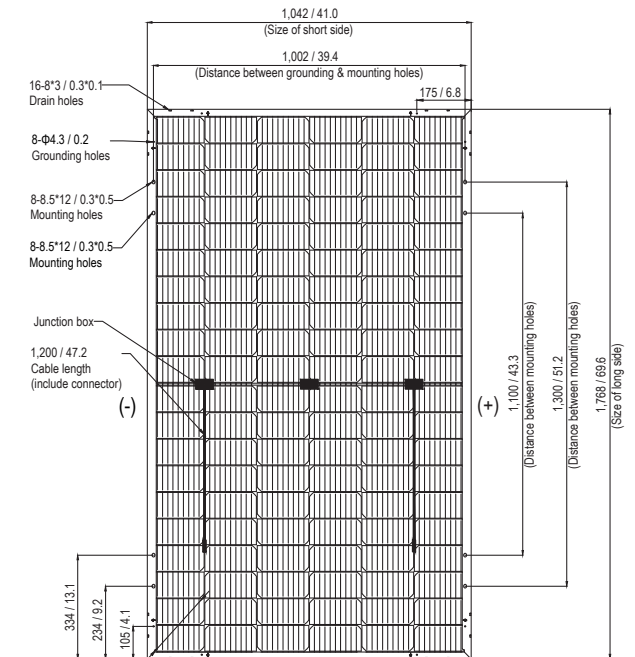

LG Electronics Inc.
Energy Business Division
LG Twin Towers, 128 Yeouui-daero, Yeongdeungpo-gu, Seoul 07336, Korea
www.lg-solar.com

Product specifications are subject to change without notice.

© 2021 LG Electronics. All rights reserved

