

# ABB string inverters

## UNO-2.0/3.0/3.6/4.2-TL-OUTD

### 2 to 4.2 kW



**This new line of transformerless single-phase inverters completes the UNO family as an optimal solution to maximize the return on investment (ROI) for residential systems.**

The new design wraps ABB's quality and engineering into just 12 kgs thanks to technological choices optimized for installations with a uniform orientation.

#### Easy to install

The presence of Plug and Play connectors, both on the DC and AC side as well as on the RS485 communication port, enable a simple, fast and safe installation of the unit even in harsh weather conditions without the need of opening the front cover of the inverter.

#### Flexibility

- The compatibility with the VSN300 Wifi Logger Card (optional) within the integrated expansion slot, assures an advanced and cost effective solution for the control and monitoring of the plant, without the need of further components
- Integrated load manager for control of energy consumption

#### Highlights

- Single-phase output
- Transformerless topology
- Each inverter is set to specific grid codes which can be selected in the field
- Wide input range and high efficiency values
- High speed and precise MPPT algorithm enables real-time power tracking and improved energy harvesting
- Plug and Play connection for DC, AC and communication side

## Additional highlights


- Integrated DC switch, in compliance with international standards (-S version)
- Natural convection cooling for maximum reliability
- Outdoor enclosure for unrestricted use under any environmental conditions



## Technical data and types

| Type code  | UNO-2.0-TL-OUTD                            | UNO-3.0-TL-OUTD | UNO-3.6-TL-OUTD | UNO-4.2-TL-OUTD |  |  |
|--|--|-----------------|-----------------|-----------------|--|--|
| <strong>Input side</strong>  |  |                 |                 |                 |  |  |
| Absolute maximum DC input voltage ( $V_{max,abs}$ )                      | 600 V                                      |                 |                 | 850 V           |  |  |
| Start-up DC input voltage ( $V_{start}$ )                                | 100...300 V (default 150 V)                |                 |                 | 380 V           |  |  |
| Operating DC input voltage range ( $V_{dcmin}...V_{dcmax}$ )             | 0.7x $V_{start}$ ...580 V (min 80 V)       |                 |                 | 350...820 V     |  |  |
| Rated DC input voltage ( $V_{dcr}$ )                                     | 400 V                                      |                 | 500 V           | 600 V           |  |  |
| Rated DC input power ( $P_{dcr}$ )                                       | 2200 W                                     | 3200 W          | 3900 W          | 4500 W          |  |  |
| Number of independent MPPT   |  |                 | 1               |                 |  |  |
| MPPT input DC voltage range ( $V_{MPPTmin}...V_{MPPTmax}$ ) at $P_{acr}$ | 180...500 V                                | 200...500 V     |                 | 380...700 V     |  |  |
| Maximum DC input current ( $I_{dcmax}$ )                                 | 12.5 A                                     | 16 A            |                 | 12.5 A          |  |  |
| Number of DC inputs pairs  |  |                 | 1               |                 |  |  |
| DC connection type   | PV quick fit connector <sup>3)</sup>       |                 |                 |                 |  |  |
| <strong>Input protection</strong>  |  |                 |                 |                 |  |  |
| Reverse polarity protection  | Yes, from limited current source           |                 |                 |                 |  |  |
| Input over voltage protection - varistor                                 | Yes  |                 |                 |                 |  |  |
| Photovoltaic array isolation control                                     | According to local standard                |                 |                 |                 |  |  |
| DC switch rating (version with DC switch)                                | 600 V, 25 A                                |                 | 1000 V, 16 A    |                 |  |  |
| <strong>Output side</strong>   |  |                 |                 |                 |  |  |
| AC Grid connection type  | Single-phase                               |                 |                 |                 |  |  |
| Rated AC power ( $P_{acr} @ \cos\phi=1$ )                                | 2000 W                                     | 3000 W          | 3600 W          | 4200 W          |  |  |
| Maximum AC output power ( $P_{acmax} @ \cos\phi=1$ )                     | 2000 W                                     | 3000 W          | 3600 W          | 4200 W          |  |  |
| Maximum apparent power ( $S_{max}$ )                                     | 2000 VA                                    | 3000 VA         | 3600 VA         | 4200 VA         |  |  |
| Rated AC grid voltage ( $V_{acr}$ )                                      | 230 V                                      |                 |                 |                 |  |  |
| AC voltage range   | 180...264 V <sup>1)</sup>                  |                 |                 |                 |  |  |
| Maximum AC output current ( $I_{ac,max}$ )                               | 10 A                                       | 15 A            | 16 A            | 20 A            |  |  |
| Contributory fault current   | 12 A                                       | 17 A            | 18 A            | 22 A            |  |  |
| Rated output frequency ( $f_r$ )   | 50 Hz / 60 Hz                              |                 |                 |                 |  |  |
| Output frequency range ( $f_{min}...f_{max}$ )                           | 47...53 Hz / 57...63 Hz <sup>2)</sup>      |                 |                 |                 |  |  |
| Nominal power factor and adjustable range                                | > 0.995, adj. $\pm 0.8$ with max $S_{max}$ |                 |                 |                 |  |  |
| Total current harmonic distortion  | < 3%                                       |                 |                 |                 |  |  |
| AC connection type   | Panel female connector                     |                 |                 |                 |  |  |
| <strong>Output protection</strong>                                       |  |                 |                 |                 |  |  |
| Anti-islanding protection  | According to local standard                |                 |                 |                 |  |  |
| Maximum external AC overcurrent protection                               | 16 A                                       | 20 A            | 20 A            | 25 A            |  |  |
| Output overvoltage protection - varistor                                 | 2 (L - N / L - PE)                         |                 |                 |                 |  |  |

## Block diagram of UNO-2.0/3.0/3.6/4.2-TL-OUTD

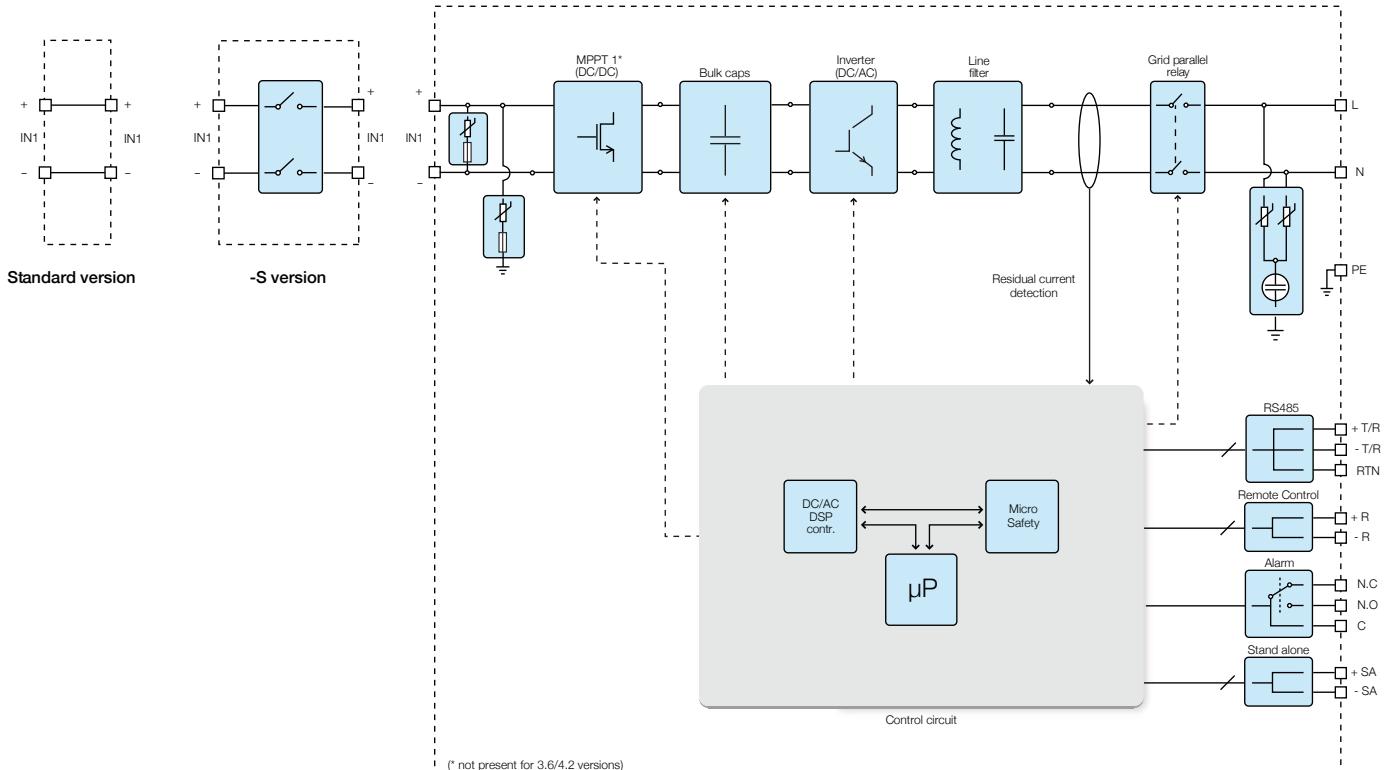

## Technical data and types

| Type code                                   | UNO-2.0-TL-OUTD  | UNO-3.0-TL-OUTD   | UNO-3.6-TL-OUTD   | UNO-4.2-TL-OUTD   |
|---|--|-------------------|-------------------|-------------------|
| <b>Operating performance</b>                |  |                   |                   |                   |
| Maximum efficiency ( $\eta_{max}$ )         | 97.30%   |                   | 98.40%            |                   |
| Weighted efficiency (EURO/CEC)              | 96.00% / -   |                   | 97.5% / -         |                   |
| Feed in power threshold                     | 10 W   |                   | 8 W               |                   |
| Night consumption                           |  | < 0.1 W           |                   |                   |
| <b>Communication</b>                        |  |                   |                   |                   |
| Remote monitoring                           | VSN300 Wifi Logger Card (opt.)   |                   |                   |                   |
| Wireless local monitoring                   | VSN300 Wifi Logger Card (opt.)   |                   |                   |                   |
| User interface                              | Display (2x16 line LCD)  |                   |                   |                   |
| <b>Environmental</b>                        |  |                   |                   |                   |
| Ambient temperature range                   | -20...+60°C, with derating > 45°C  |                   |                   |                   |
| Relative humidity                           | 0...100% condensing  |                   |                   |                   |
| Maximum operating altitude without derating | 2000 m / 6560 ft   |                   |                   |                   |
| <b>Physical</b>                             |  |                   |                   |                   |
| Environmental protection rating             | IP65   |                   |                   |                   |
| Cooling                                     | Natural  |                   |                   |                   |
| Dimension (H x W x D)                       | 553 x 418 x 175 mm / 21.8" x 16.5" x 6.9"  |                   |                   |                   |
| Weight                                      | 12 kg / 26.45 lb   |                   |                   |                   |
| Mounting system                             | Wall bracket   |                   |                   |                   |
| <b>Safety</b>                               |  |                   |                   |                   |
| Isolation level                             | Transformerless  |                   |                   |                   |
| Marking                                     | CE   |                   |                   |                   |
| Safety and EMC standard                     | IEC/EN 62109-1, IEC/EN 62109-2, EN 61000-6-2, EN 61000-6-3, EN 61000-3-2, EN 61000-3-3 C10/11, EN 50438, CEI 0-21, DIN V VDE V 0126-1-1, VDE-AR-N 4105, G83/2, G59/3, VFR 2014, IEC 61727, IEC 62116, NRS-097-2-1, RD 413, AS 4777, MEA, ABNT NBR16149/16150 |                   |                   |                   |
| <b>Available products variants</b>          |  |                   |                   |                   |
| Standard                                    | UNO-2.0-TL-OUTD  | UNO-3.0-TL-OUTD   | UNO-3.6-TL-OUTD   | UNO-4.2-TL-OUTD   |
| With DC switch                              | UNO-2.0-TL-OUTD-S  | UNO-3.0-TL-OUTD-S | UNO-3.6-TL-OUTD-S | UNO-4.2-TL-OUTD-S |


<sup>1)</sup> The AC voltage range may vary depending on specific country grid standard

<sup>2)</sup> The Frequency range may vary depending on specific country grid standard


<sup>3)</sup> Please refer to the document "String inverters – Product manual appendix" available at [www.abb.com/solarinverters](http://www.abb.com/solarinverters) for information on the quick-fit connector brand and model used in the inverter

**Remark.** Features not specifically listed in the present data sheet are not included in the product

## Efficiency curves of UNO-3.0-TL-OUTD

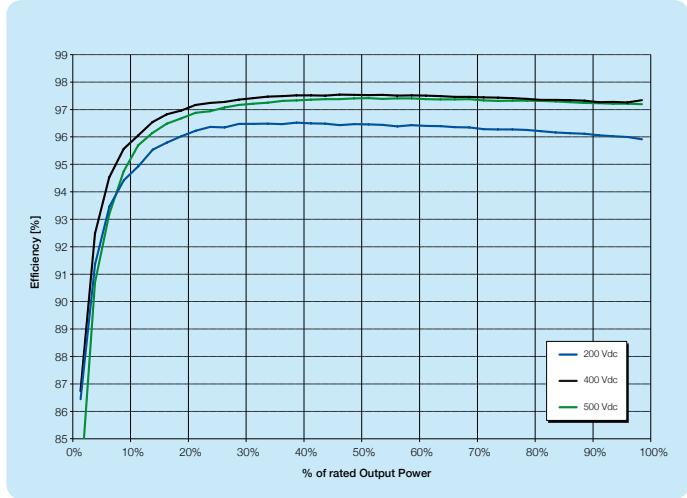

## Efficiency curves of UNO-4.2-TL-OUTD

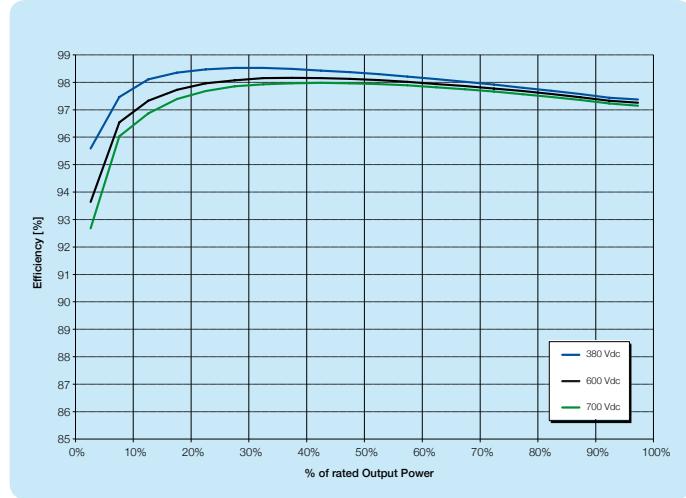

### Support and service

ABB supports its customers with dedicated, global service organization in more than 60 countries and strong regional and national technical partner networks providing complete range of life cycle services.

For more information please contact your local ABB representative or visit:

[www.abb.com/solarinverters](http://www.abb.com/solarinverters)  
[www.abb.com/solar](http://www.abb.com/solar)  
[www.abb.com](http://www.abb.com)

© Copyright 2016 ABB. All rights reserved.  
Specifications subject to change without notice.

