


# US270M60B

**Monocrystalline PV Module**

*All black*

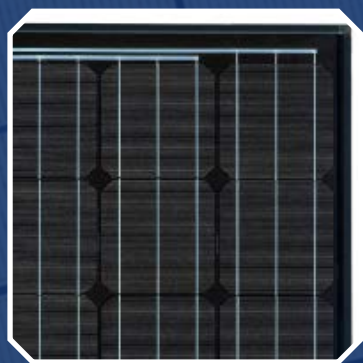

# US270M60B *All black*

## STC\*


Type	US260M60B	US265M60B	US270M60B
P <sub>max</sub> [W]	260	265	270
V <sub>mpp</sub> [V]	32.10	32.40	32.52
I <sub>mpp</sub> [A]	8.10	8.18	8.30
V <sub>oc</sub> [V]	38.22	38.34	38.64
I <sub>sc</sub> [A]	8.91	8.96	8.99
Max. System Voltage	1000V DC	1000V DC	1000V DC

\* STC – Standard Test Conditions, measurement conditions: intensity irradiation 1000 W/m<sup>2</sup>, spectral distribution AM 1.5, temperature 25 ± 2°C, according to standard EN 60904-3

\*\* Power Measuring tolerances ± 3%

## Mechanical characteristics

Solar Cells	60 crystalline solar cells, 156 x 156 mm
Glass	Solar glass with anti-reflection surface treatment, 3.2 mm
IP protection level	IP65/IP67
Bypass-Diodes	3 pcs.
Cables and connector	Junction box with MC4 (pluggable) connectors, cable: 2 x 900 mm / 4 mm <sup>2</sup>
Dimensions (LxWxH)	1640 x 992 x 40 mm
Weight	19.3 kg
Mechanical ratings	Suction pressure of 2400 Pa approved (Wind speed 130 km/h with safety factor 3), load of 5400 Pa approved

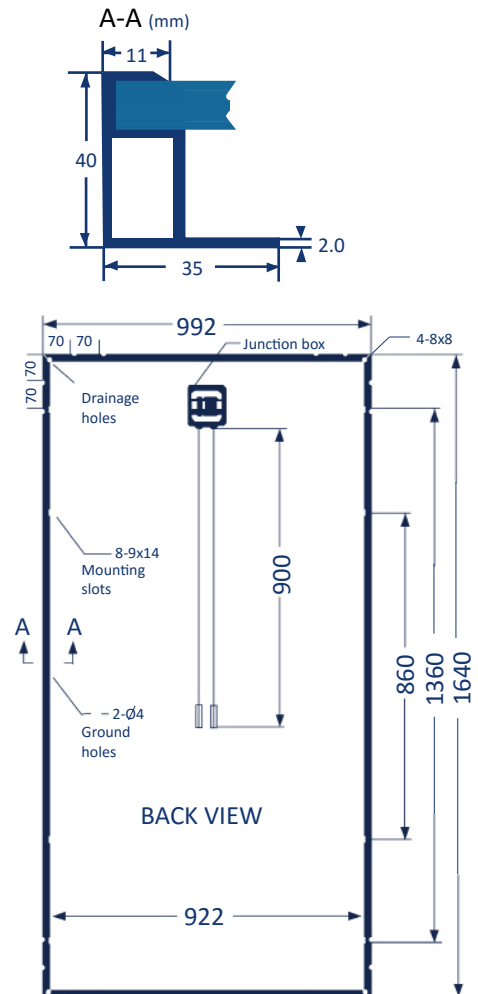

## Temperature Coefficients

Type	US260M60B <i>All black</i>
NOCT	47 ± 2 °C
P <sub>max</sub>	- 0.39%/K
V <sub>oc</sub>	- 0.34%/K
I <sub>sc</sub>	0.036%/K
Operating Temperature Range	- 40 °C bis + 85 °C

## Packaging

Container	20" GP	40" HC
Pallets	14	28
Number per pallet	26 x 12 + 16 x 2	30
Amount	344	840

Unimen Solar reserves the right to change specifications without notice.



Revision 02-2016

Unimen Solar Co., Ltd  
Mergenthalerallee 79  
65760 Eschborn  
Germany

Tel.: +49(0)6196 769 1872  
Fax: +49(0)6196 777 3897  
info@unimen-solar.de  
www.unimen-solar.de

