

# D6P\_B3A

## 240W - 270W

### Multi-Crystalline Photovoltaic Module



Positive power tolerance  
0~+4.99 watt



Withstand strong wind/snow load up to 5400 Pa  
Pass ASTM E330; Maximum wind speed: 197 km/h (safety factor 3)  
(Short-side installation  $\geq$  2400 Pa guaranteed)



Excellent low light performance  
3.5% relative eff. reduction at low-irradiance (200W/m<sup>2</sup>)




100% EL inline inspection  
Better module reliability



Prolonged aging test  
2000 hours damp heat test; 400 thermal cycles



Ammonia resistance  
According to IEC 62716 Ed. 1

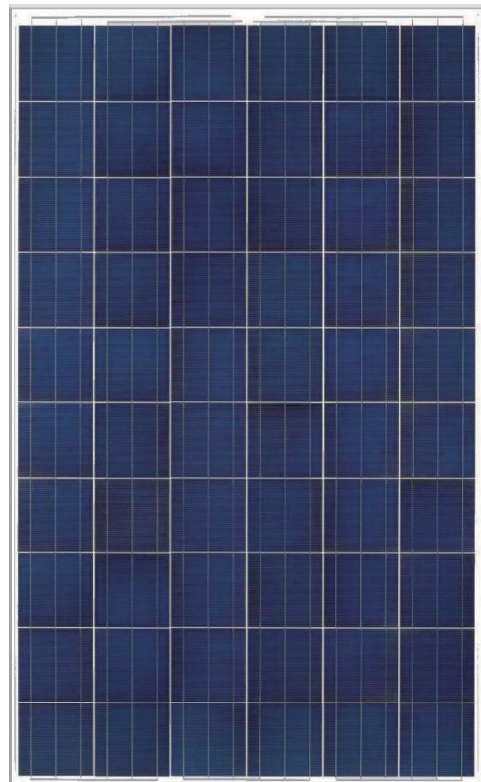

www.tuv.com  
ID 0000039214



Certificate Number MCS PV0203 Technology



PHOTOVOLTAIC MODULE  
E330639



#### Reliability & Certification


Product guarantee: 10-year

Linear Performance Warranty

- 1-year: 97% power output then power degradation 0.7% per year till 25th year
- 25-year: 80.2% power output
- 10-year: 90.7% power output

IEC 61215 / IEC61730, CE, MCS, UL1703, CEC

\* Please refer to NSP product warranty for details

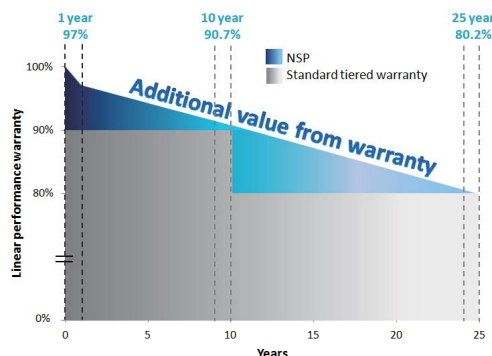

For more information, please visit us at [www.nsp.com](http://www.nsp.com)



# NEO SOLAR POWER

## Electrical Data

MODEL	D6P 240 B3A	D6P 245 B3A	D6P 250 B3A	D6P 255 B3A	D6P 260 B3A	D6P 265 B3A	D6P 270 B3A	†D6P 275 B3A
Maximum Rating Power (Pmax)	240 W	245 W	250 W	255 W	260 W	265 W	270 W	275 W
Module Efficiency	14.8%	15.1%	15.4%	15.7%	16.0%	16.3%	16.6%	16.9%
Open Circuit Voltage (Voc)	36.99 V	37.16 V	37.33 V	37.50 V	37.67 V	38.17 V	38.39 V	38.63 V
Maximum Power Voltage (Vpm)	29.76 V	30.05 V	30.34 V	30.64 V	30.93 V	30.97 V	31.04 V	31.18 V
Short Circuit Current (Isc)	8.54 A	8.61 A	8.69 A	8.76 A	8.83 A	9.02 A	9.15 A	9.23 A
Maximum Power Current (Ipm)	8.06 A	8.15 A	8.24 A	8.32 A	8.43 A	8.58 A	8.73 A	8.85 A

\*Electrical data under Standard Test Conditions (STC): Cell Temperature of 25 °C, Irradiance 1000 W/m<sup>2</sup>, AM 1.5

\*Values w/o tolerance are typical numbers; specifications subject to change

†275W for IEC 61215 / IEC61730, CE, MCS only

## Mechanical Data

Item	Specification
Dimension	1640 mm (L) x 992 mm (W) x 40 mm (D) / 64.5" (L) x 39.1" (W) x 1.57" (D)
Weight	18.5 kg / 40.8 lbs
Solar Cell	60 multicrystalline 6" silicon cells
Front Glass	Anti-reflective tempered solar glass, 3.2mm thickness
Cell Encapsulation	EVA (Ethylene-Vinyl-Acetate)
Back Cover	Composite film, white
Junction Box	IP 67 rated
Frame	Anodized aluminum frame, original or black
Packaging Configuration	26 pcs Per Pallet, 728 pcs Per 40' HQ container

## Operating Conditions

Item	Specification
Mechanical Load	5400 Pa (Certified by TUV Rheinland)
Maximum System Voltage	DC 1000 V
Series Fuse Rating	15 A
Operating Temperature	-40 to 85 °C

## Temperature Characteristics


Item	Specification
Nominal Operating Cell Temperature	44 °C ± 2°C
Temperature Coefficient of Isc	0.046 % / °C
Temperature Coefficient of Voc	-0.313 % / °C
Temperature Coefficient of Pmax	-0.420 % / °C

\* Nominal Operating Cell Temperature (NOCT): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20 °C, Wind Speed 1 m/s


\* Please refer to NSP's Standard Module Installation Manual before using the product

\* Reduction in efficiency from 1000 W/m<sup>2</sup> to 200 W/m<sup>2</sup> at 25 °C: 3.5% ± 2 %


## Front View & Back View

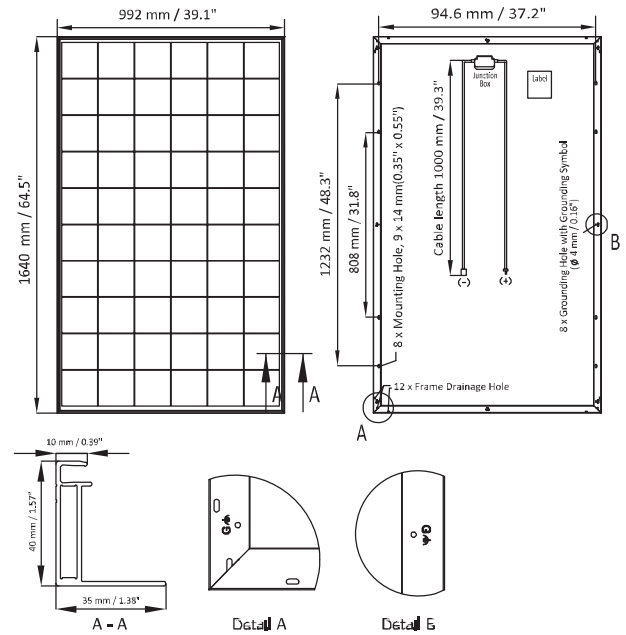

## Dependence on Temperature

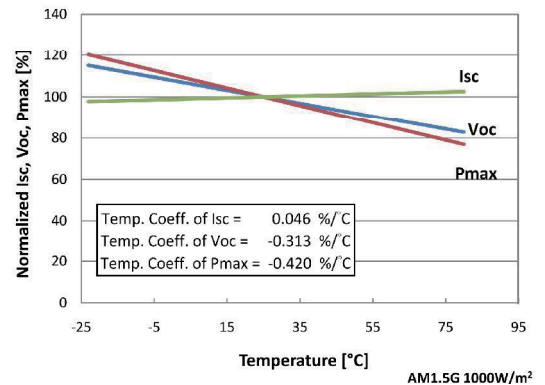

## Dependence on Irradiance

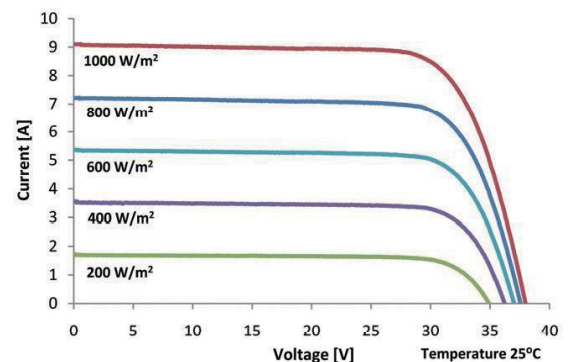

## Contact Us

### Neo Solar Power Corporation

Headquarters: 7, Li-Hsin 3rd Rd., Hsinchu  
Science Park, Hsinchu, 30078, Taiwan

Tel: +886-3-578-0011  
Fax: +886-3-578-1255

www.nsp.com

Email: sales.module@nsp.com  
Website: www.nsp.com